



1750L

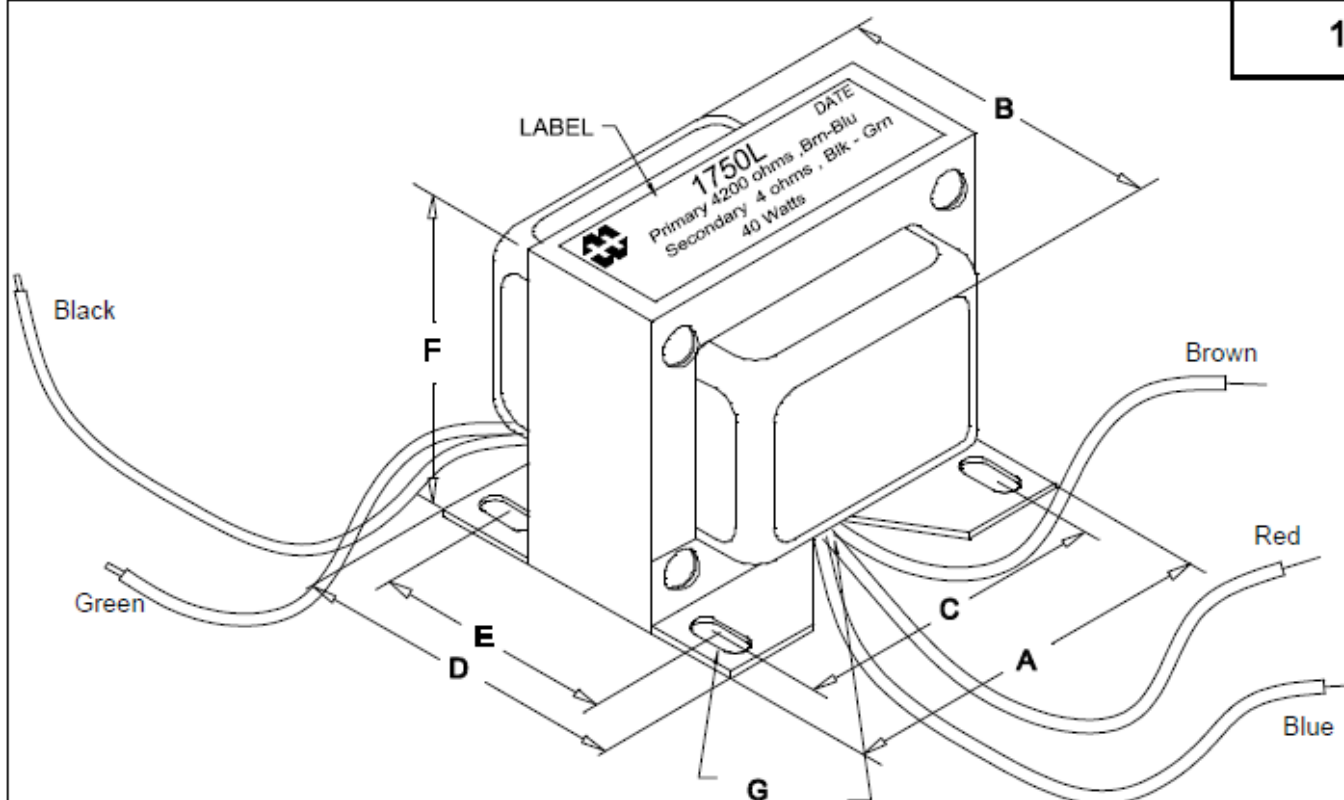

NOTE: All LEADS 9.0" OUT MIN.

**DIMENSIONS:**

|   |                            |
|---|----------------------------|
| A | 4.050" $\pm 0.063$         |
| B | 3.050" $\pm 0.125$         |
| C | 3.500" $\pm 0.063$         |
| D | 2.490" $\pm 0.063$         |
| E | 1.940" $\pm 0.063$         |
| F | 3.460" $\pm 0.063$         |
| G | 0.187"X 0.300" $\pm 0.015$ |

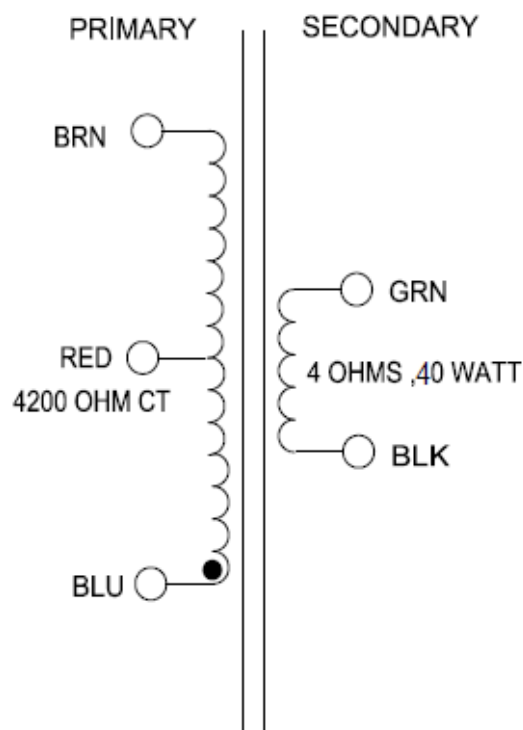**ELECTRICAL DATA:**

|                |                                              |
|----------------|----------------------------------------------|
| Turns ratio:   | 31.16 : 1                                    |
| Inductance     | @240V, 60Hz => 106.10H (Open circuit)        |
| DCR            | @ 20C, BLU - BRN = 98.6 $\Omega$ $\pm 20\%$  |
|                | @ 20C, BLK - GRN = 0.170 $\Omega$ $\pm 20\%$ |
| FREQ. RESP     | @ 50W, 70Hz - 15kHz REF. TO 1kHz $\pm 1$ dB  |
| Pri. Impedance | 4200 $\Omega$ CT, 458 V                      |
| Sec. Impedance | 4 $\Omega$ (124.14 V)                        |
| Power          | 50 WATTS                                     |