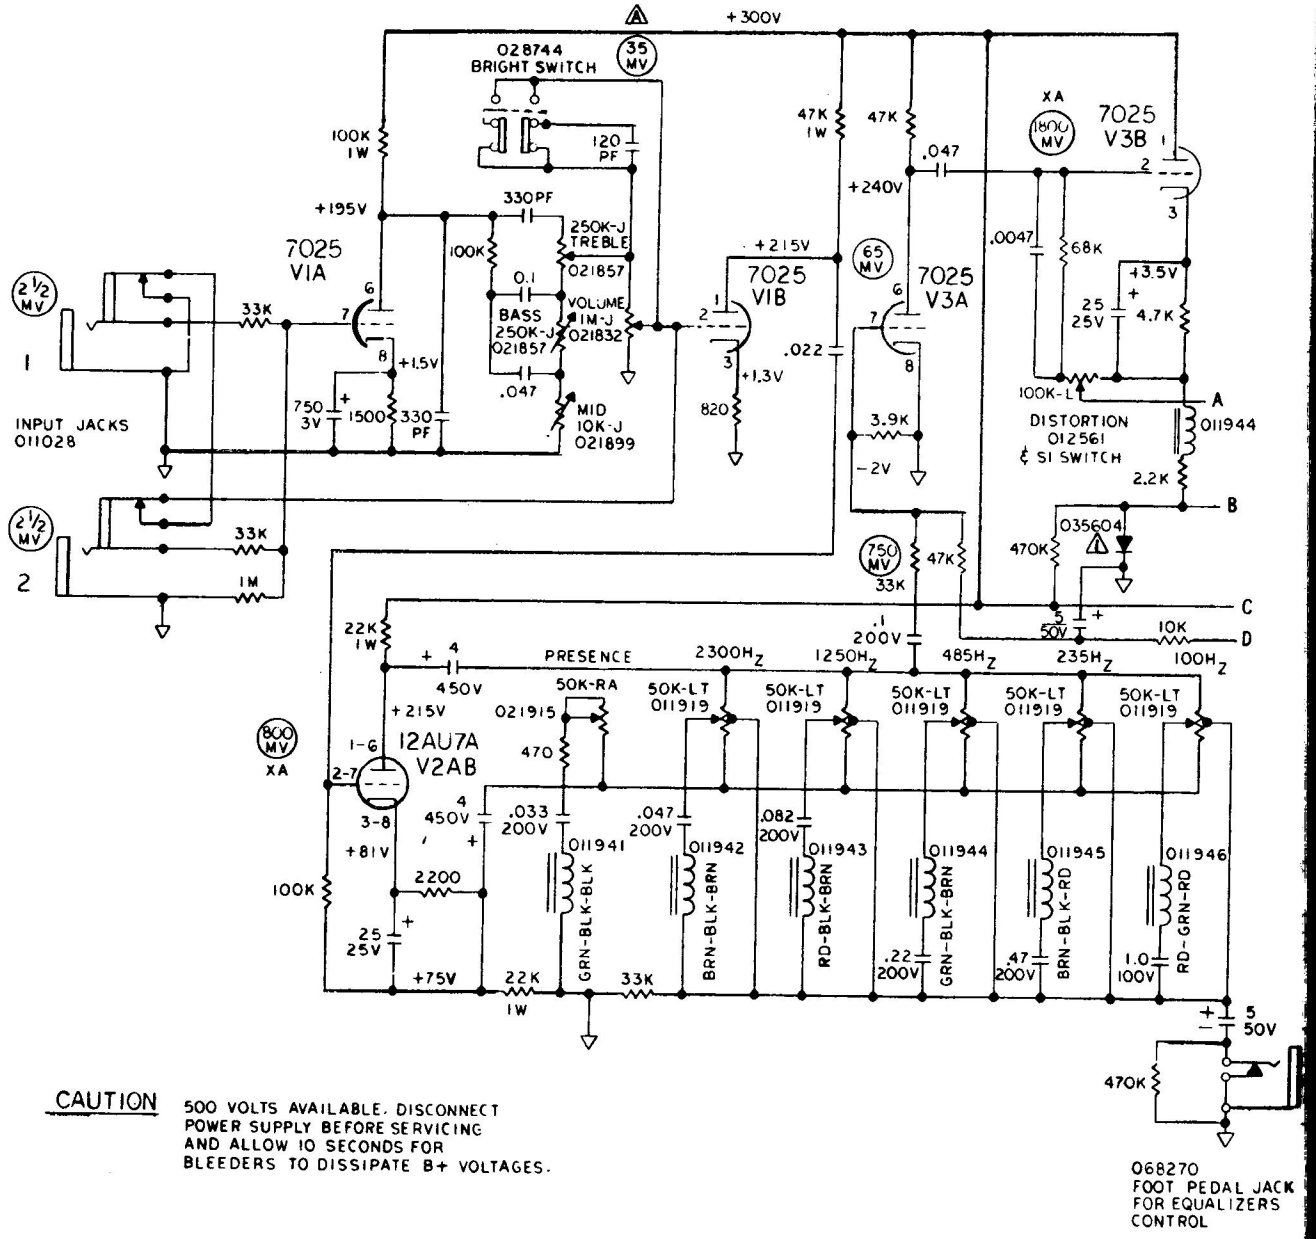

CAUTION 500 VOLTS AVAILABLE. DISCONNECT POWER SUPPLY BEFORE SERVICING AND ALLOW 10 SECONDS FOR BLEEDERS TO DISSIPATE B+ VOLTAGES.

TEST DATA

(MV) DENOTES TYPICAL $1KH_Z$ SIGNAL FOR 10 WATTS OUTPUT.
INSERT PLUG INTO INPUT JACK ⚠.
CONTROL SETTINGS- EQUALIZERS AT MID POSITION.
DISTORTION AND PRESENCE AT MINIMUMUM.
OTHERS AT MAXIMUM.

XA-USE 0.1MFD 600V CAPACITOR IN SERIES WITH GENERATOR.

D.C. VOLTAGES READ WITH NO SIGNAL INPUT AND DISTORTION "OFF".

⚠ 035604 CONDUCTS WITH DISTORTION "ON".

2. ALL RESISTORS ARE 1/2W, 10%.

1. ALL CAPACITORS AT LEAST 600 W.V.D.C.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES: UNLESS OTHERWISE SPECIFIED

Fender Model Super Twin Guitar-Bass Amp