





VOLTAGE CHART					
PT. NO.	NO. LOAD	150 W RMS OUT.	PT. NO.	NO. LOAD	150 W RMS OUT.
(1)	227	218	(10)	251	251
(2)	171	1.65	(11)	507	472
(3)	232	219	(12)	504	459
(4)	210	193	(13)	-53	-55
(5)	N/A	N/A	(14)	-53	-55
(6)	193	173	(15)	505	458
(7)	1.6	1.3	(16)	508	472
(8)	270	270	(17)	25	24
(9)	38	40	(18)	22.5	22.8

NOTES:

- VOLTAGES TAKEN UNDER FOLLOWING CONDITIONS:
A. INPUT: 1 KHZ. SINE WAVE IN TO "BOTH IN" (J3) JACK.
B. CONTROLS: BRITE & NORMAL VOLUME, BASS, MID, TREBLE & MASTER VOLUMES, AND PRESENCE CONTROL SET AT "10".
C. LOAD: 4 OHM RESISTIVE. OUTPUT SELECTOR SET AT 4 Ω, ADJUST INPUT SIGNAL LEVEL TO GIVE 24.5 VRMS ACROSS LOAD.
- HUM BALANCE: HUM BALANCE CONTROL SET TO MINIMUM HUM WITH "BOTH IN" (J3) INPUT OPEN. CAUTION: PREAMP STAGES MUST BE SHIELDED FOR THIS ADJUSTMENT. IF NO SHIELD IS AVAILABLE, ADJUST WITH AMPLIFIER IN ITS CABINET. ALL CONTROLS SET AT "10."
- BIAS: SET BIAS FOR -55 VOLTS WITH STANDBY SWITCH "ON".
- POTS R8, R9, R15, R16, R19, R44, R48 ARE LINEAR TAPER.
- POTS R18 & R25 ARE REVERSE LOG.
- ALL RESISTOR VALUES ARE 1/2W, 5% UNLESS OTHERWISE SPECIFIED.

Version with mid select slide switch

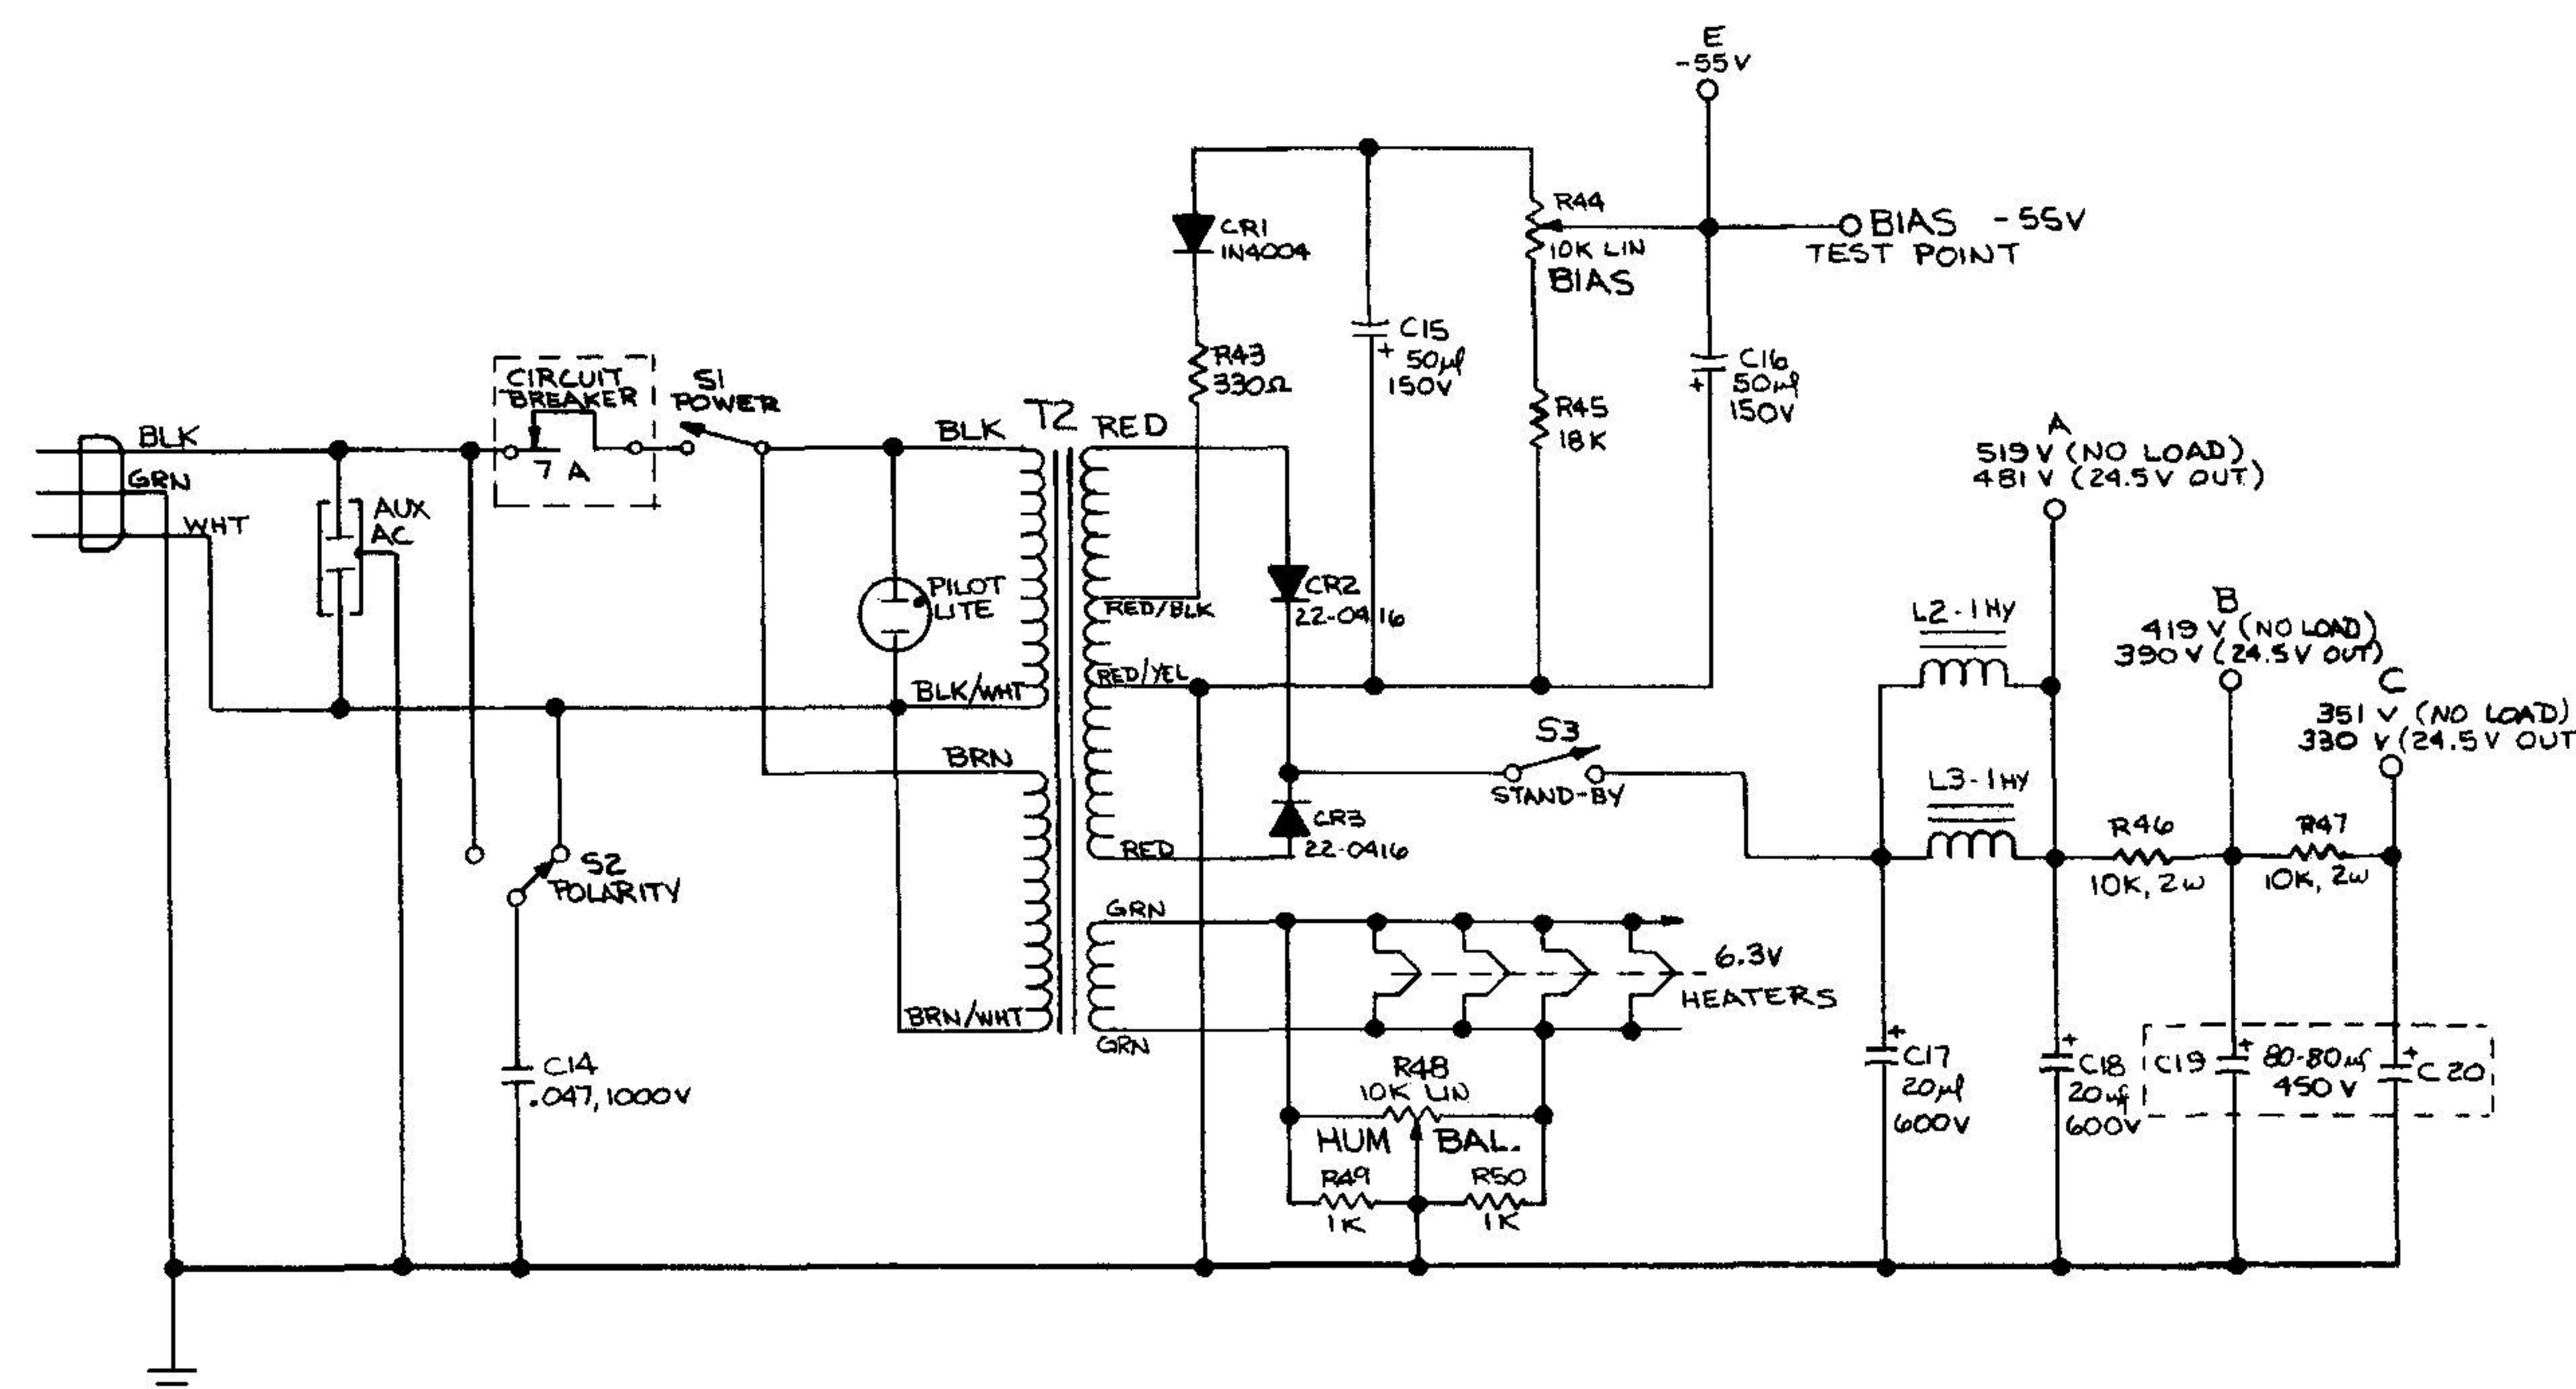

TOLERANCES (EXCEPT AS NOTED)		SUNN		Sunn Musical Equip. Co. Sunn Industrial Park Tualatin Oregon 97062	
DECIMAL	±	MODEL T (SUPER)	SCALE	DATE	APPROVED BY
FRACTIONAL	±	TITLE			
ANGULAR	±	DATE	DRAWING NUMBER		
		2-12-75	D1029		C