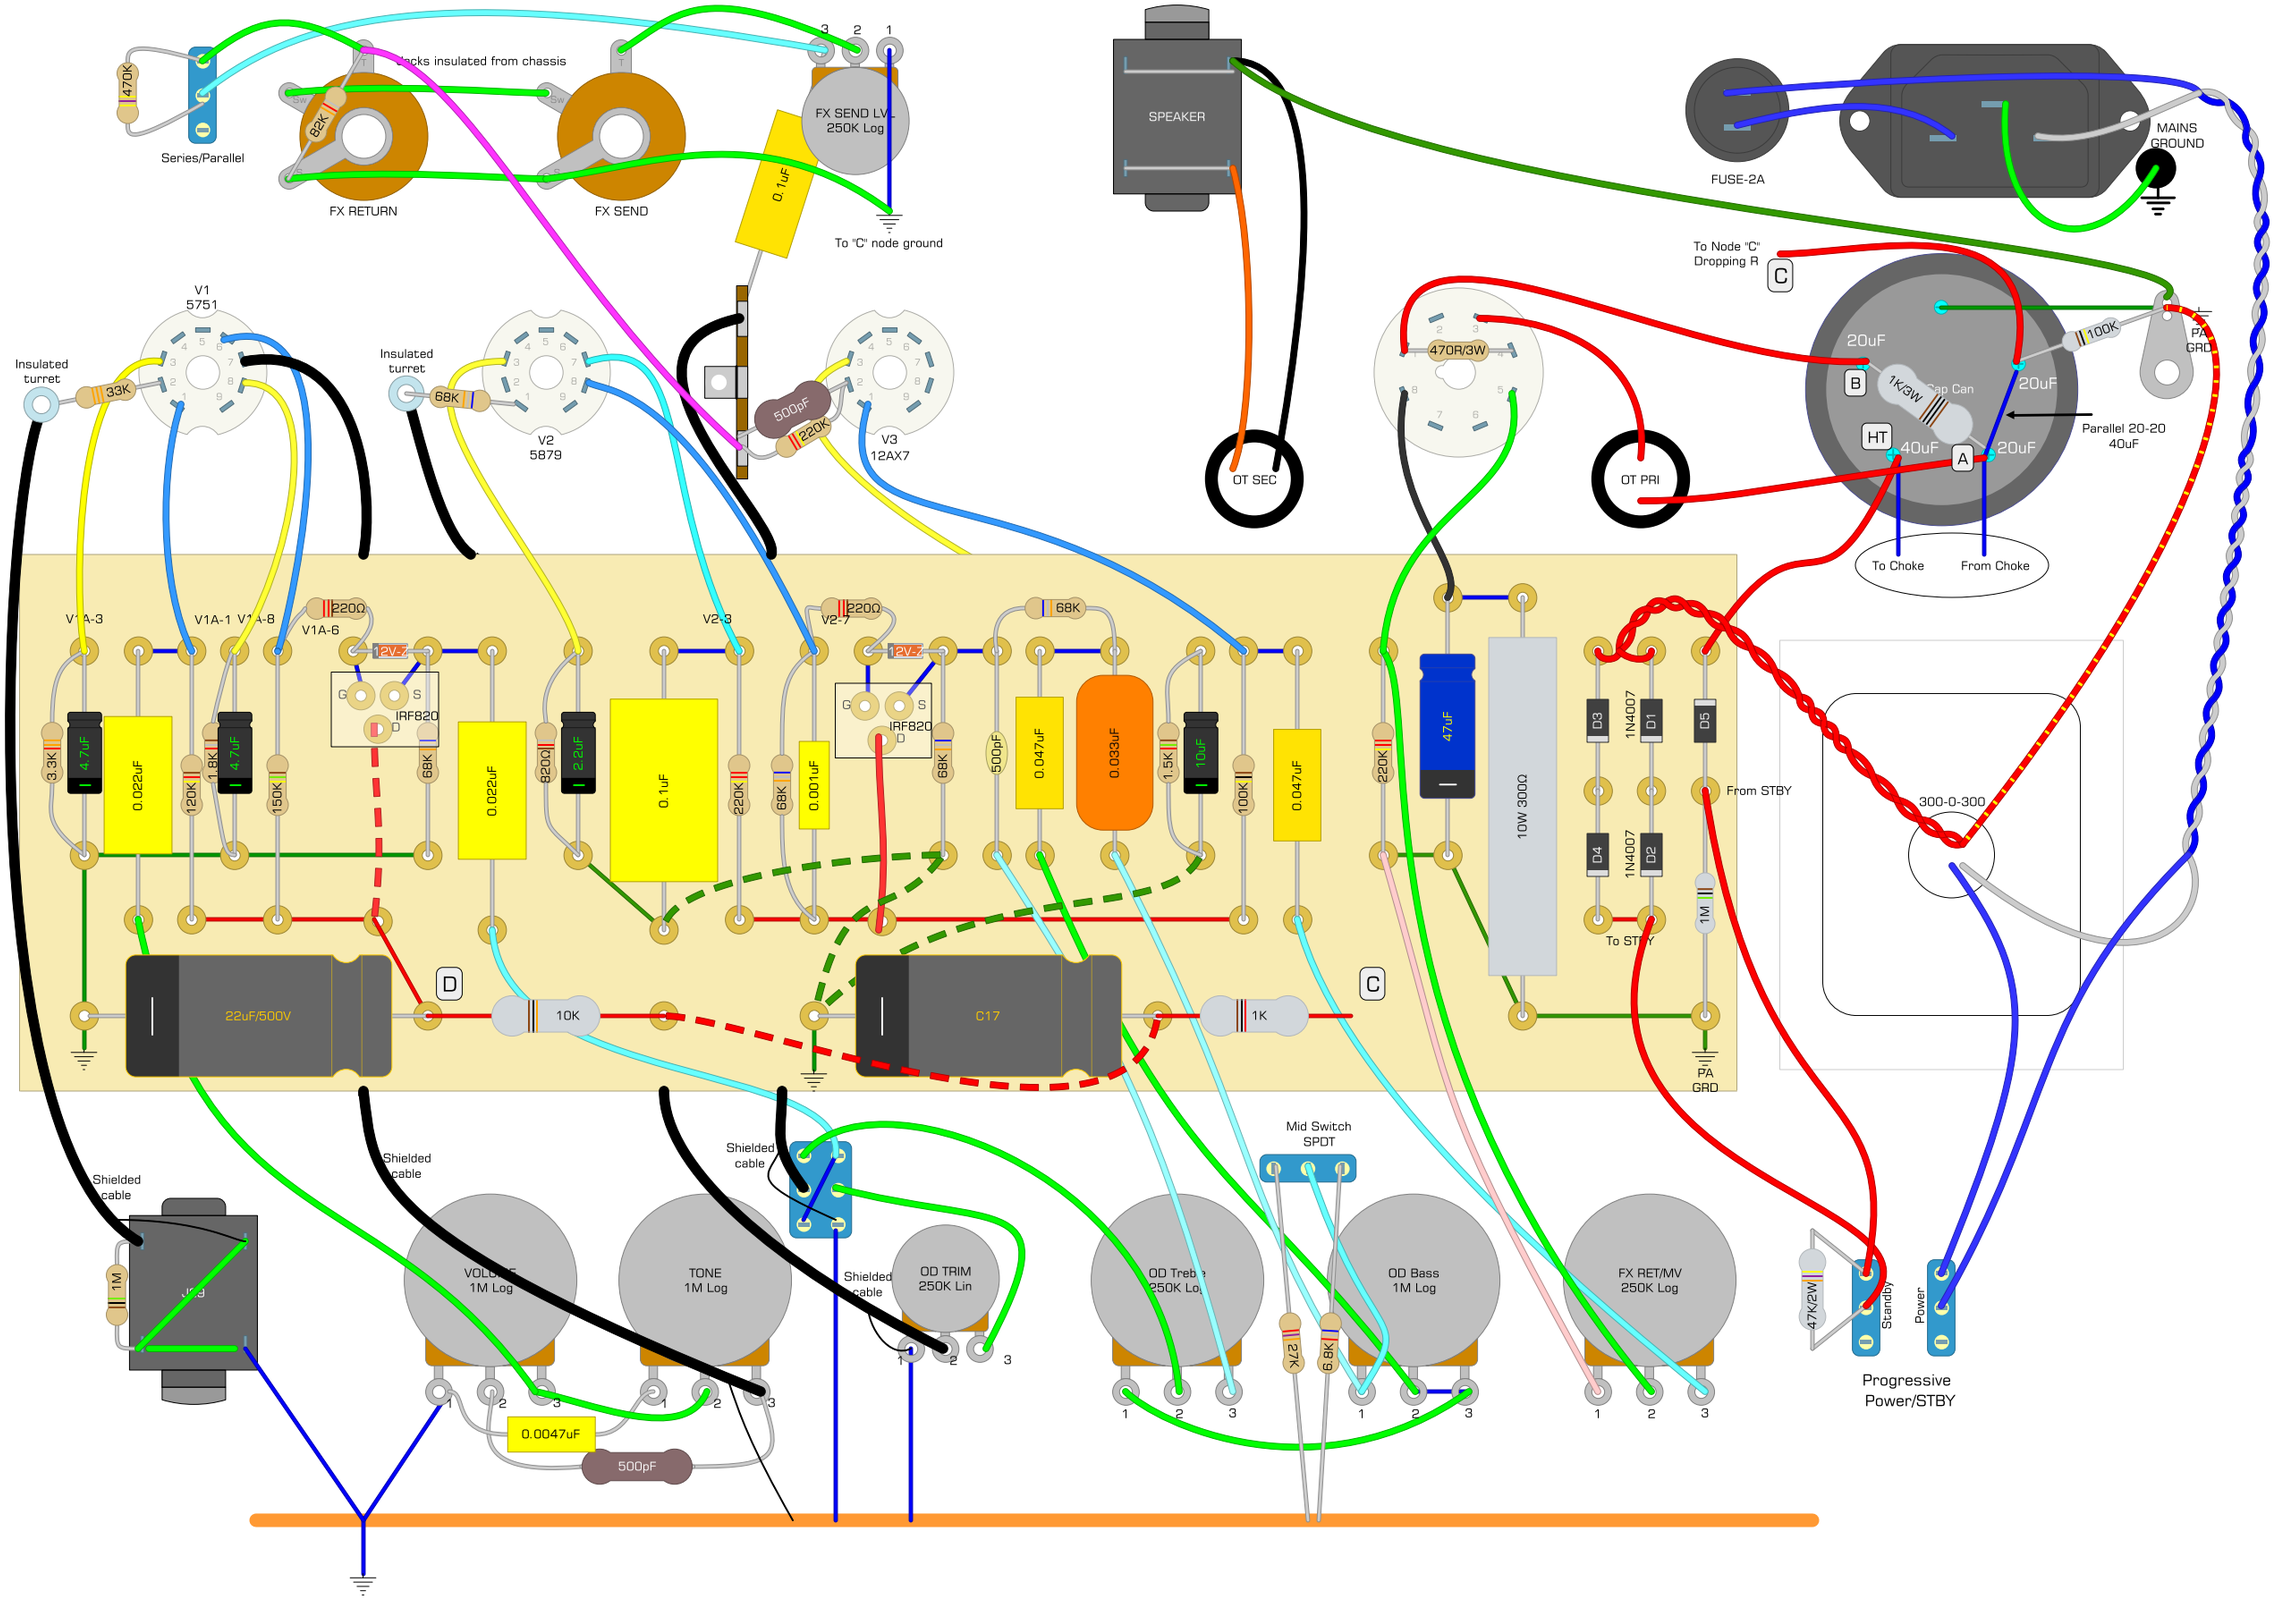
470K
Series/Parallel
Jacks insulated from chassis
82K
FX RETURN
FX SEND
3 2 1
FX SEND LVL
250K Log
0.1uF
To "C" node ground
SPEAKER
FUSE-2A
MAINS GROUND
To Node "C"
Dropping R
C
V1
5751
Insulated turret
33K
Insulated turret
68K
V2
5879
500pF
220K
V3
12AX7
470R/3W
OT SEC
OT PRI
20uF
B
1K/3W
Cap Can
20uF
100K
PA GRD
HT
40uF
A
20uF
Parallel 20-20
40uF
To Choke
From Choke
V1A-3
V1A-1 V1A-8
220Ω
V1A-6
2V-2
IRF820
V2-3
V2-7
220Ω
2V-2
IRF820
68K
3.3K
4.7uF
0.022uF
120K
1.8K
4.7uF
150K
68K
0.022uF
820Ω
2.2uF
0.1uF
220K
68K
0.001uF
68K
500pF
0.047uF
0.033uF
1.5K
10uF
100K
0.047uF
220K
47uF
10W 300Ω
D3
1N4007
D1
D5
D4
1N4007
D2
From STBY
To STBY
1M
300-0-300
PA GRD
D
22uF/500V
10K
C17
1K
C
Shielded cable
Shielded cable
Shielded cable
Shielded cable
1M
VOLUME
1M Log
TONE
1M Log
OD TRIM
250K Lin
OD Treble
250K Log
Mid Switch
SPDT
27K
6.8K
OD Bass
1M Log
FX RET/MV
250K Log
0.0047uF
500pF
47K/2W
Standby
Power
Progressive
Power/STBY