


INSTRUCTIONS

SPEAKER LINE ATTENUATOR

FEATURES

- 10-step attenuation for high level audio signal.
- Low insertion loss.
- Controls up to 35 watts of speaker load.
- Handles 70V/25V RMS input.
- Stainless steel panel.
- Easy installation.

CONNECTION DIAGRAM

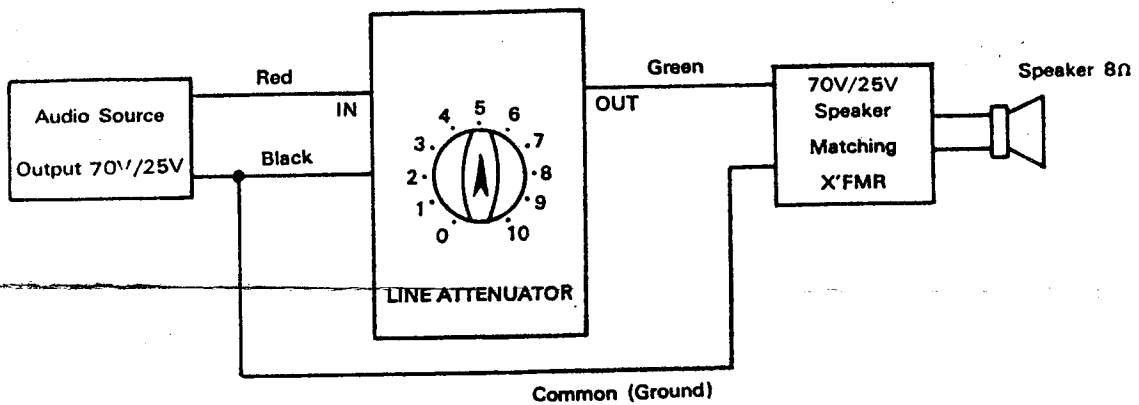

NOTE: Red Wire-Input
 Black Wire-Common (Ground)
 Green Wire-Output

ATTENUATIONS

<u>STEP</u>	<u>ATTENUATIONS</u>
10	0 (dB)
9	-3 ±0.3
8	"
7	"
6	"
5	"
4	"
3	"
2	-6 ±0.3
1	"
(Off)	-

BOGEN.
 COMMUNICATIONS, INC.
 ATTENUATOR