


- 1) REMOVE REAR GRILL PANEL
- 2) PLACE AMP FACE DOWN AND REMOVE BOTTOM FOUR SCREWS
- 3) SLIDE CHASSIS OUT AND TURN OVER TO EXPOSE CIRCUITRY
- 4) LOCATE THE PARTS TO BE CHANGED NEAR THE LOOP JACKS
- 5) CAREFULLY UNSOLDER AND REMOVE THE COMPONENTS AS SHOWN
- 6) REINSTALL THE TWO COMPONENTS INTO THE OPPOSITE LOCATIONS AS SHOWN

MODIFICATION TO ADJUST LOOP LEVELS
 CHANGE R10: NOW 10K CHANGE TO 47K
 CHANGE R13: NOW 47K CHANGE TO 10K

NOTE: IF PARTS ARE REMOVED CAREFULLY, THEY CAN
 SIMPLY BE SWAPPED BETWEEN TO TWO POSTIONS.

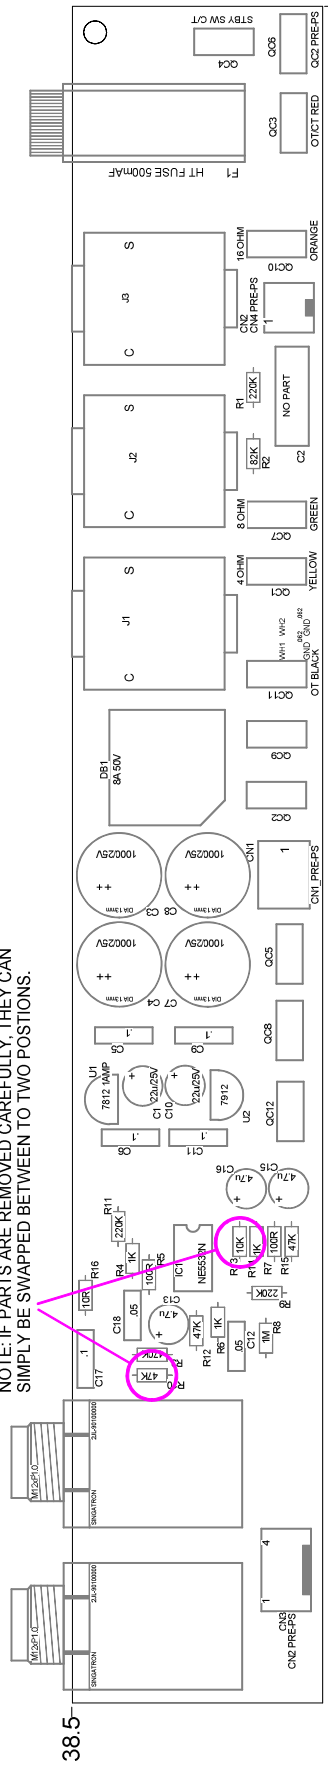

TOP VIEW OF REAR PANEL JACK BOARD.