


FLUX BAND

290AX

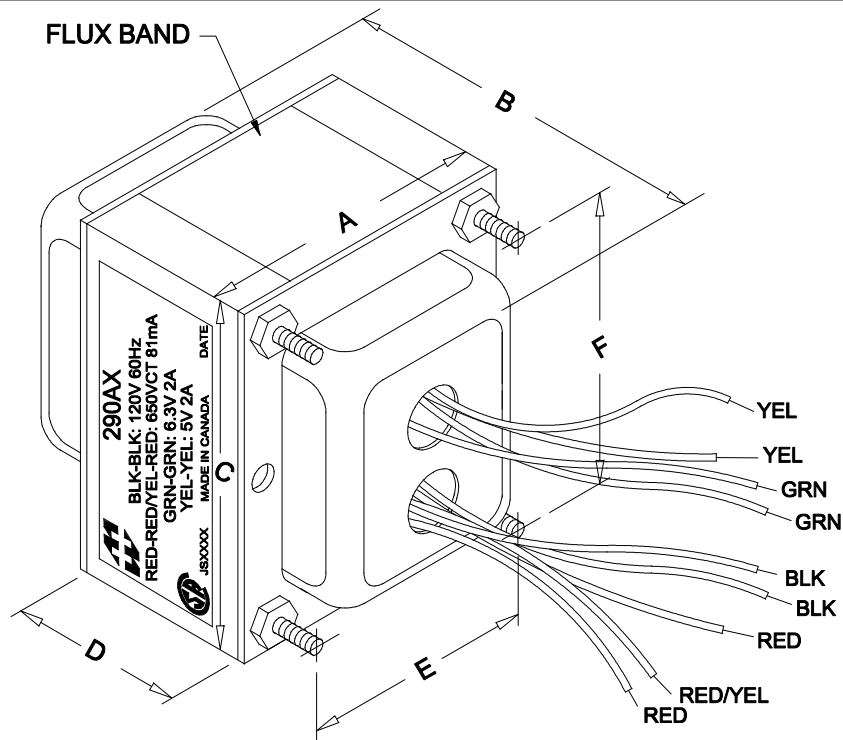


DIMENSIONS:

A	2.500" ± 0.063
B	2.817" ± 0.063
C	3.000" ± 0.063
E	1.25" ± 0.063
F	2.000" ± 0.063
G	2.500" ± 0.063


NOTE: ALL LEADS 9" OUT MIN., STRIPPED .5"

PRIMARY SECONDARY

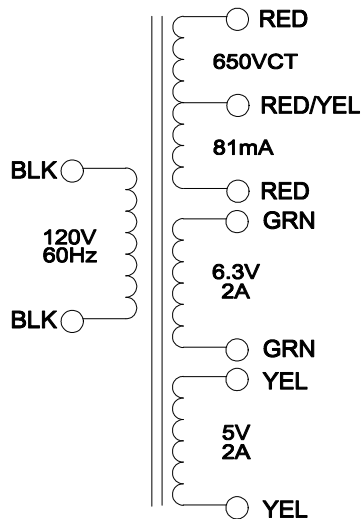

ELECTRICAL DATA:

Turns ratio:	1 : 5.82 (RED - RED)
Exciting Current	@ 120V, 60Hz, BLK - BLK = 175mA Max.
DCR	@ 20C, BLK - BLK = 4.892 $\Omega \pm 20\%$
	@ 20C, RED - RED = 333.2 $\Omega \pm 20\%$
	@ 20C, GRN - GRN = 0.108 $\Omega \pm 20\%$
	@ 20C, YEL - YEL = 0.088 $\Omega \pm 20\%$
Pri. Voltage	120V 60Hz
Sec. Voltage (RMS)	650VCT @ 81mA / 6.3V @ 2A / 5V @ 2A
No Load Voltage	698.6VCT / 6.76V / 5.3V



**HAMMOND
ELECTRONICS**

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.

PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE

POWER TRANSFORMER

			DR BY IOAN POP
1	08/11/09	PRELIMINARY.	I.P. DATE 05/12/09
NO	DATE	REVISION	DIM IN(X)MM()

290AX