

RESISTANCE READINGS


| ITEM | TUBE | Pin 1 | Pin 2 | Pin 3 | Pin 4 | Pin 5 | Pin 6 | Pin 7 | Pin 8 | Pin 9 |
|------|--------|-------|--------|-------|-------|-------|-------|-------|-------|--------|
| V1 | 12AX7A | 1235K | 820K | 820Ω | FIL | FIL | 1235K | 820K | 820Ω | FIL |
| V2 | 12AX7A | 182K | 10meg | 0Ω | FIL | FIL | 148K | 22K | 820Ω | FIL |
| V3 | 12AX7A | 187K | 125K | 1800Ω | FIL | FIL | 187K | 125K | 1800Ω | FIL |
| V4 | 6B05 | NC | 1.2meg | 180Ω | FIL | FIL | NC | 580Ω | NC | 14500Ω |
| V5 | 12AX7A | 187K | 880K | 1500Ω | FIL | FIL | 187K | 320K | 1200Ω | FIL |
| V6 | 6B05 | NC | 220K | 120Ω | FIL | FIL | NC | 1315Ω | NC | 14500Ω |
| V7 | 6B05 | NC | 220K | 120Ω | FIL | FIL | NC | 1340Ω | TP | 14500Ω |
| V8 | 6B05 | NC | 1.2meg | 180Ω | FIL | FIL | NC | 580Ω | NC | 14500Ω |
| V9 | 6CA4 | 105Ω | NC | 190K | FIL | FIL | NC | 100Ω | NC | NC |

† THIS READING WILL VARY DEPENDING UPON THE CONDITION OF THE ELECTROLYTIC IN THE CIRCUIT.
 ‡ MEASURED FROM PIN 3 OF V9.
 NC NO CONNECTION
 TP TIE POINT


SEE PARTS LIST FOR ALTERNATE VALUE OR APPLICATION

- DC voltage measurements taken with vacuum tube voltmeter; AC voltages measured with 1000 ohm per volt voltmeter.
- Socket connections are shown as bottom views.
- Measured values are from socket pin to common ground.
- Line voltage maintained at 117 volts for voltage readings.
- Nominal tolerance of component values makes possible a variation of ±1% in voltage and resistance readings.
- All controls at minimum, proper output load connected.

A PHOTOFAC STANDARD NOTATION SCHEMATIC
 © Howard W. Sams & Co., Inc. 1962

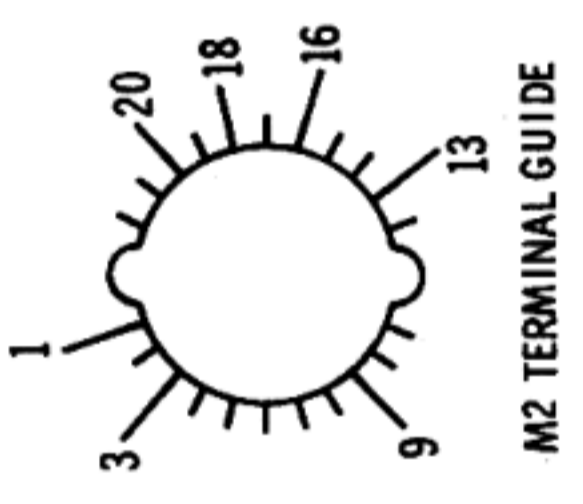

INTERCONNECTING PLUG AND SOCKET BASING DIAGRAM



JUMPER USED IN MODEL SK-70

