


# CXC Series

## POWER CHOKE

### CXC125-10H-200mA

10H at 200mA DC choke.

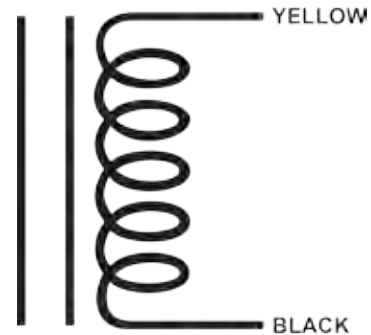

#### Design

Mathematically designed to produce 10H at 200mA DC. A lower DC current will slightly increase inductance.

#### Magnet Wire

All units are wound with the finest virgin copper magnet wire. All windings use heavy insulated wire to provide excellent manufacturing yield, lower customer cost and superior life.

#### The Core

EDCOR uses the finest M6 line grain oriented steel cores. Each unit is hand stacked to assure at least 92% stack.

#### The Bobbins

EDCOR's royal blue bobbin with black finishing tape.

#### Termination

The terminations are UL1015, 18 lead wire.

#### Mounting

This unit comes with steel end bells for mounting with the use of four screws. The end bells are powder coated Gentian Blue (RAL 5010) to add to your tube display and overall appearance.

#### Specifications

Inductance	10H
Max. Current	200mA
DC Resistance	75 Ohms
Frequency	120 Hz.
Bobbin Material	Glass Filled Nylon 6/6
Flamability Rating	Class B 130°C
Core Material	M6 29 ga. line grain oriented steel
Termination	UL1015, 18 ga. lead wire
Mounting	Powder coated steel end bells
Weight	4.5 lbs.
Dimensional Drawing	<a href="#">15000-EI125-125-0X</a>
Compliance	RoHS, REACH



edcorusa.com

