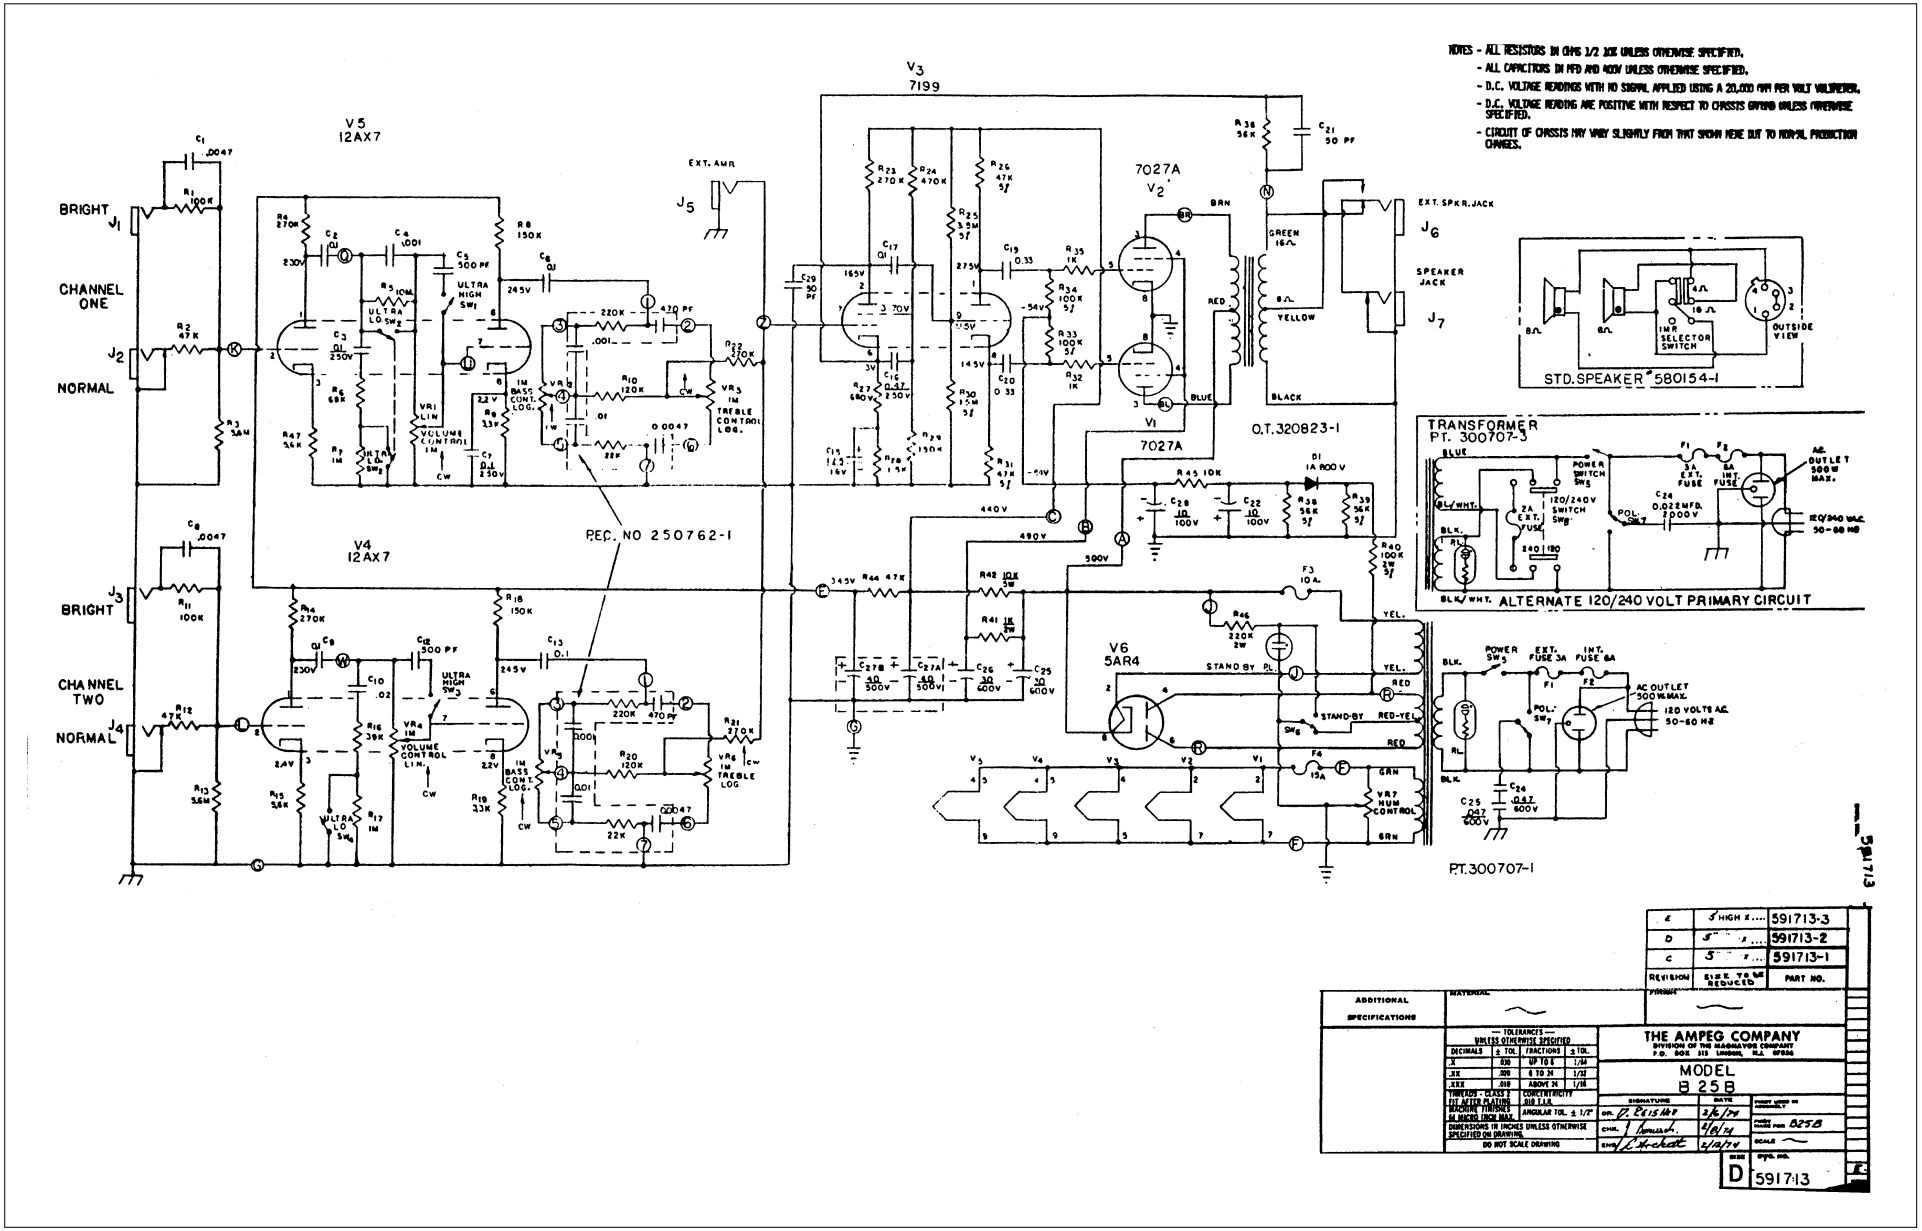
NOTES - ALL RESISTORS IN OHMS 1/2 10% UNLESS OTHERWISE SPECIFIED.
- ALL CAPACITORS IN MFD AND 400V UNLESS OTHERWISE SPECIFIED.
- D.C. VOLTAGE READINGS WITH NO SIGNAL APPLIED USING A 20,000 OHM PER VOLT VOLTMETER.
- D.C. VOLTAGE READING ARE POSITIVE WITH RESPECT TO CHASSIS GROUND UNLESS OTHERWISE SPECIFIED.
- CIRCUIT OF CHASSIS MAY VARY SLIGHTLY FROM THAT SHOWN HERE DUE TO NORMAL PRODUCTION CHANGES.
BRIGHT
CHANNEL ONE
NORMAL
BRIGHT
CHANNEL TWO
NORMAL
V5 12AX7
V4 12AX7
V3 7199
7027A V2
V1 7027A
V6 5AR4
EXT. AMP.
EXT. SPKR. JACK
SPEAKER JACK
O.T. 320823-1
P.E.C. NO 250762-1
P.T. 300707-1
STD. SPEAKER 580154-1
TRANSFORMER PT. 300707-3
ALTERNATE 120/240 VOLT PRIMARY CIRCUIT
AC OUTLET 500W MAX.
120 VOLTS AC 50-60 HZ
591713-3
591713-2
591713-1
REVISION
PART NO.
ADDITIONAL SPECIFICATIONS
THE AMPEG COMPANY
MODEL B 25 B
DO NOT SCALE DRAWING
D 591713