





5F2-A Stock & current configuration

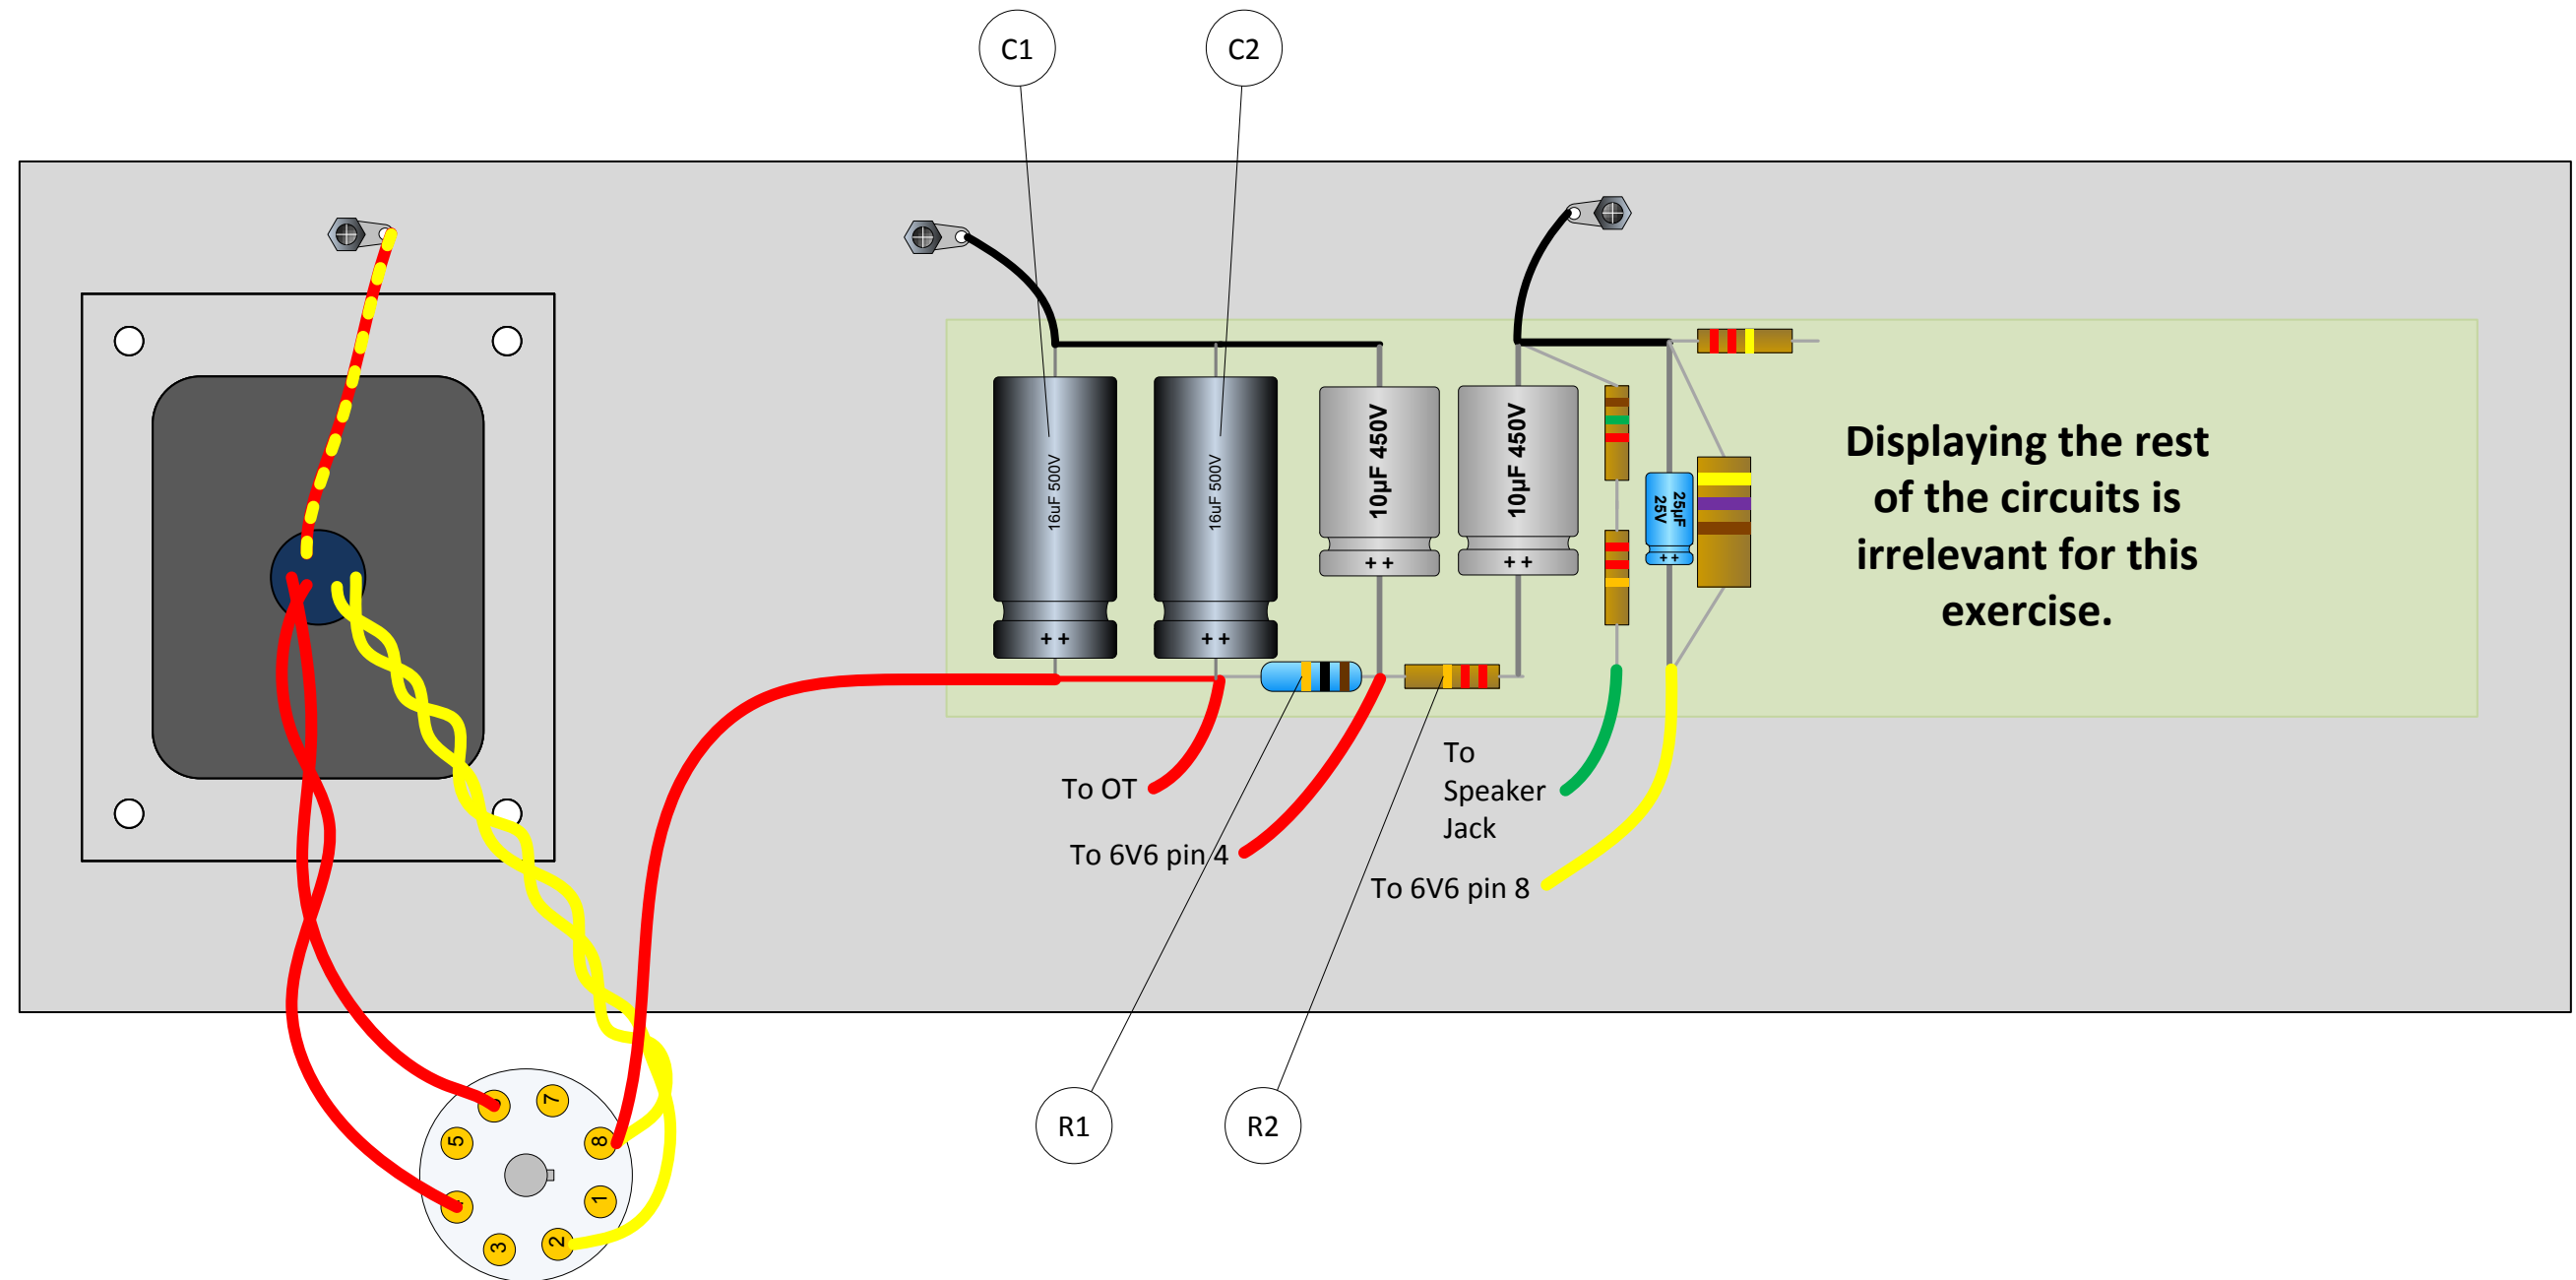

Power transformer replaced
with ClassicTone 40-18027
650VCT & 550VCT
USE the 550VCT

Replace C1 & C2 with 47uF
450V or 500V parts.

Replace C3 & C4 with 22uF
450V or 500V parts.

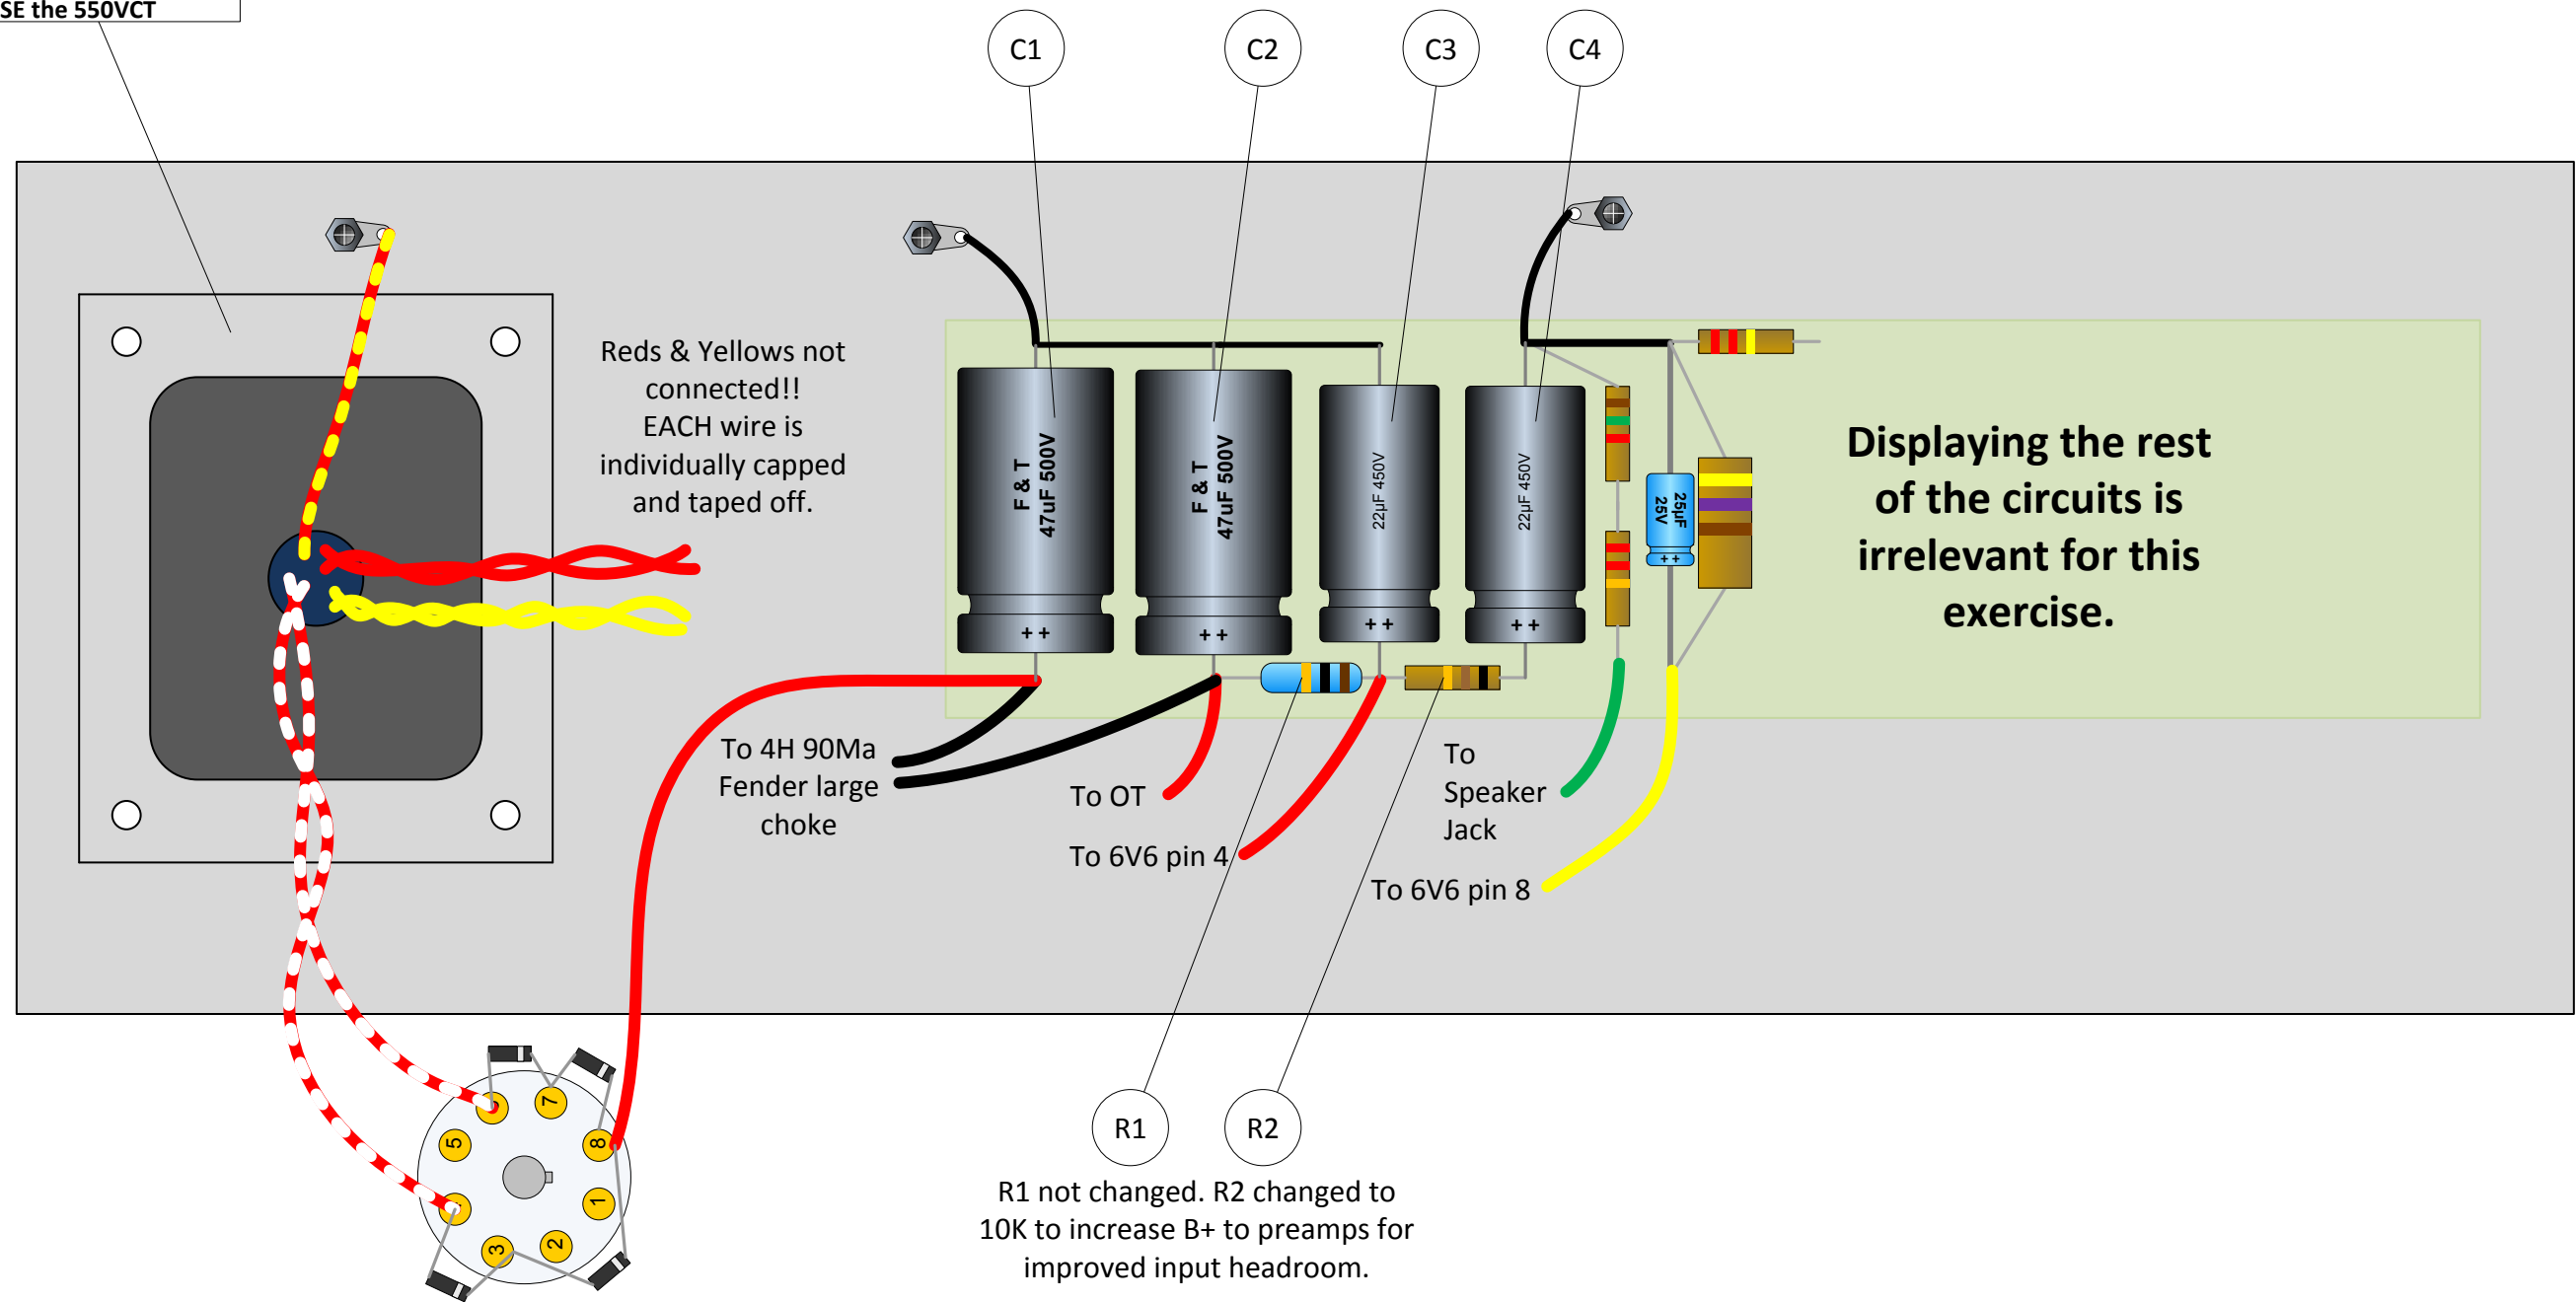

Remove 5Y3 rectifier &
install 4x 1N4007 silicon
diodes as shown.

5F2-A Modified for use with Solid State rectifiers & Pi filter.