



TEST CONDITIONS:  
 INPUT SIGNAL - 15V RMS @ 1KHz  
 POST GAIN FULL  
 TONE CONTROLS AT 12:00  
 ADJUST PRE GAIN FOR 22V RMS AT OUTPUT  
 40HM LOAD CONNECTED TO 40HM AUX. JACK

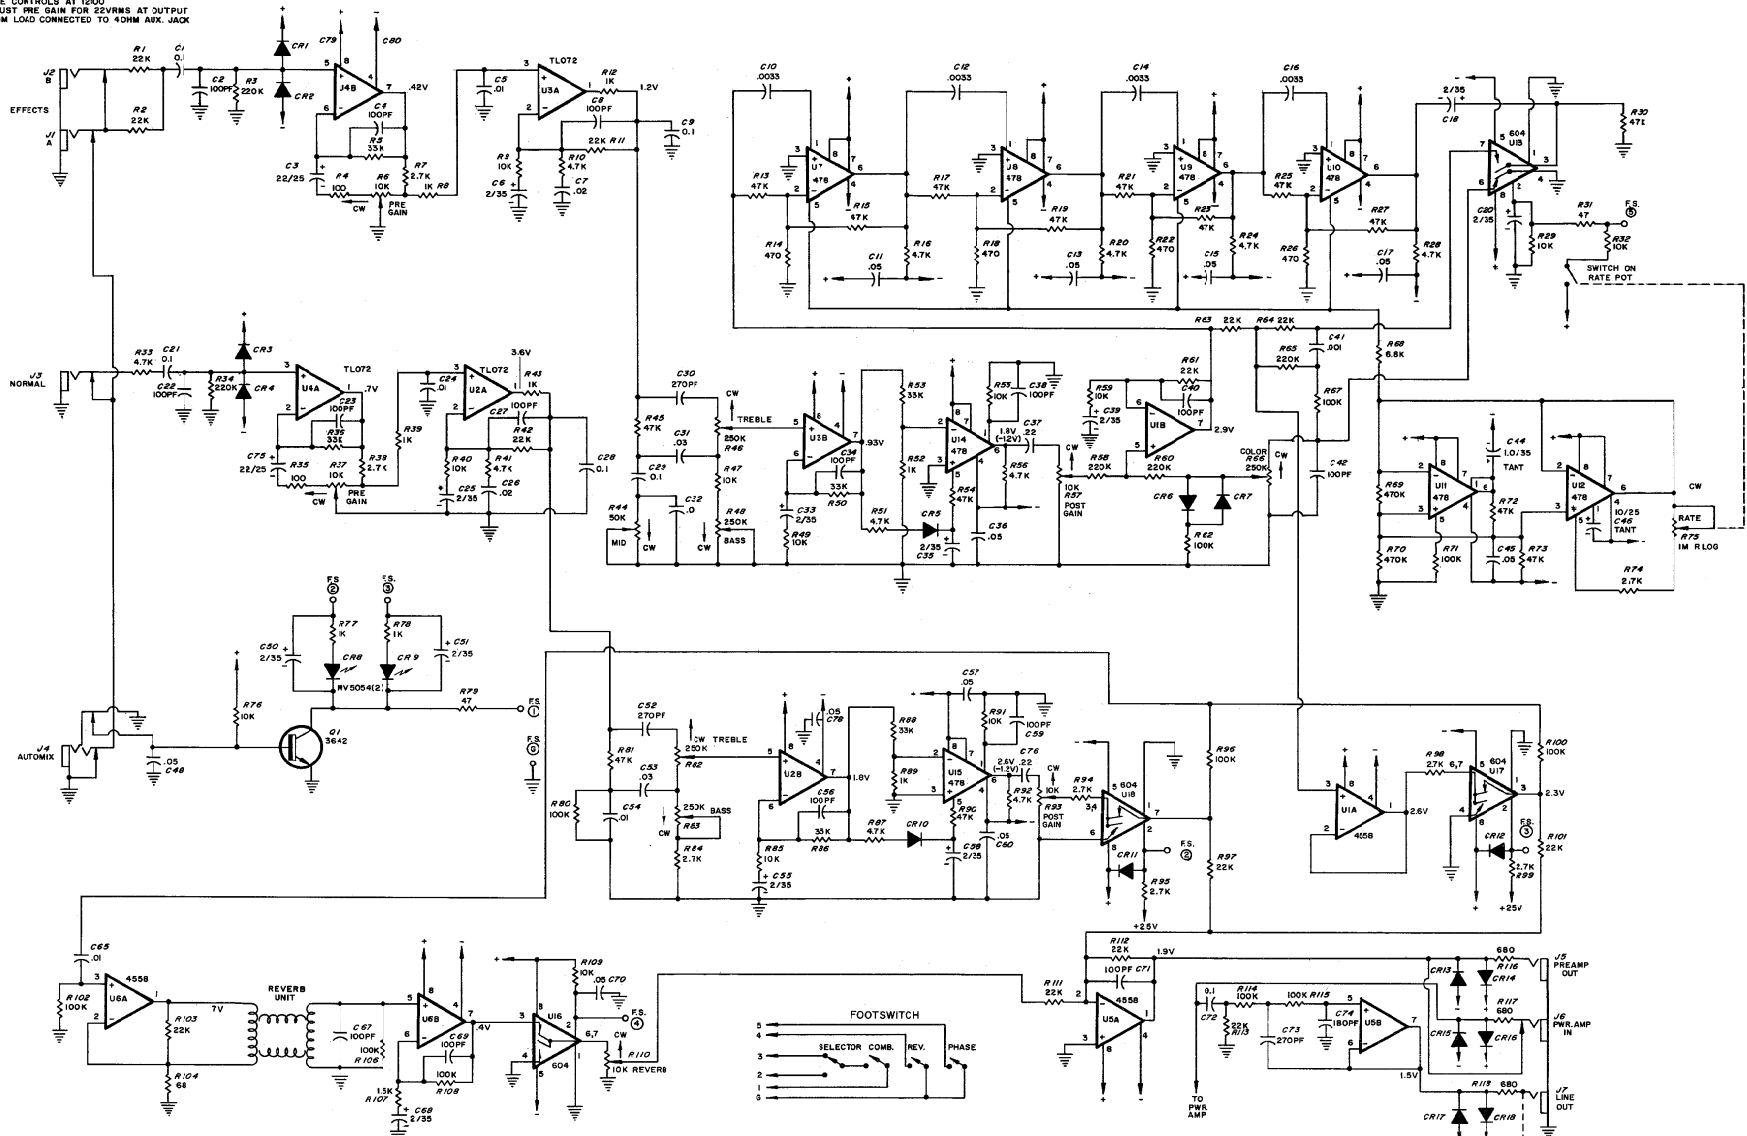

NOTES  
 ALL RESISTORS 1/4W UNLESS NOTED  
 ALL CAPACITORS IN MFD UNLESS NOTED  
 ALL DIODES IN 1N4148 UNLESS NOTED  
 LAST REF. DESIGNATOR USED:  
 F-118  
 C-81  
 CR-18  
 L-18  
 POWER SUPPLY ±18.0V REG.

VOLTAGES  
 2V = RMS VOLTAGE  
 (2V) = DC VOLTAGE



PEAVEY ELECTRONICS CORP.  
 MERIDIAN, MS  
 DRAWN BY [Signature] DATE 4-18-79  
 CK BY A. X. T. P. 18  
 APPR BY [Signature]

REVISED 5/11/81  
 P/N 81501065

DEUCE / MACE  
 VI SERIES  
 282AMP  
 80 # 99008032