


jamesmccanna@gmail.com

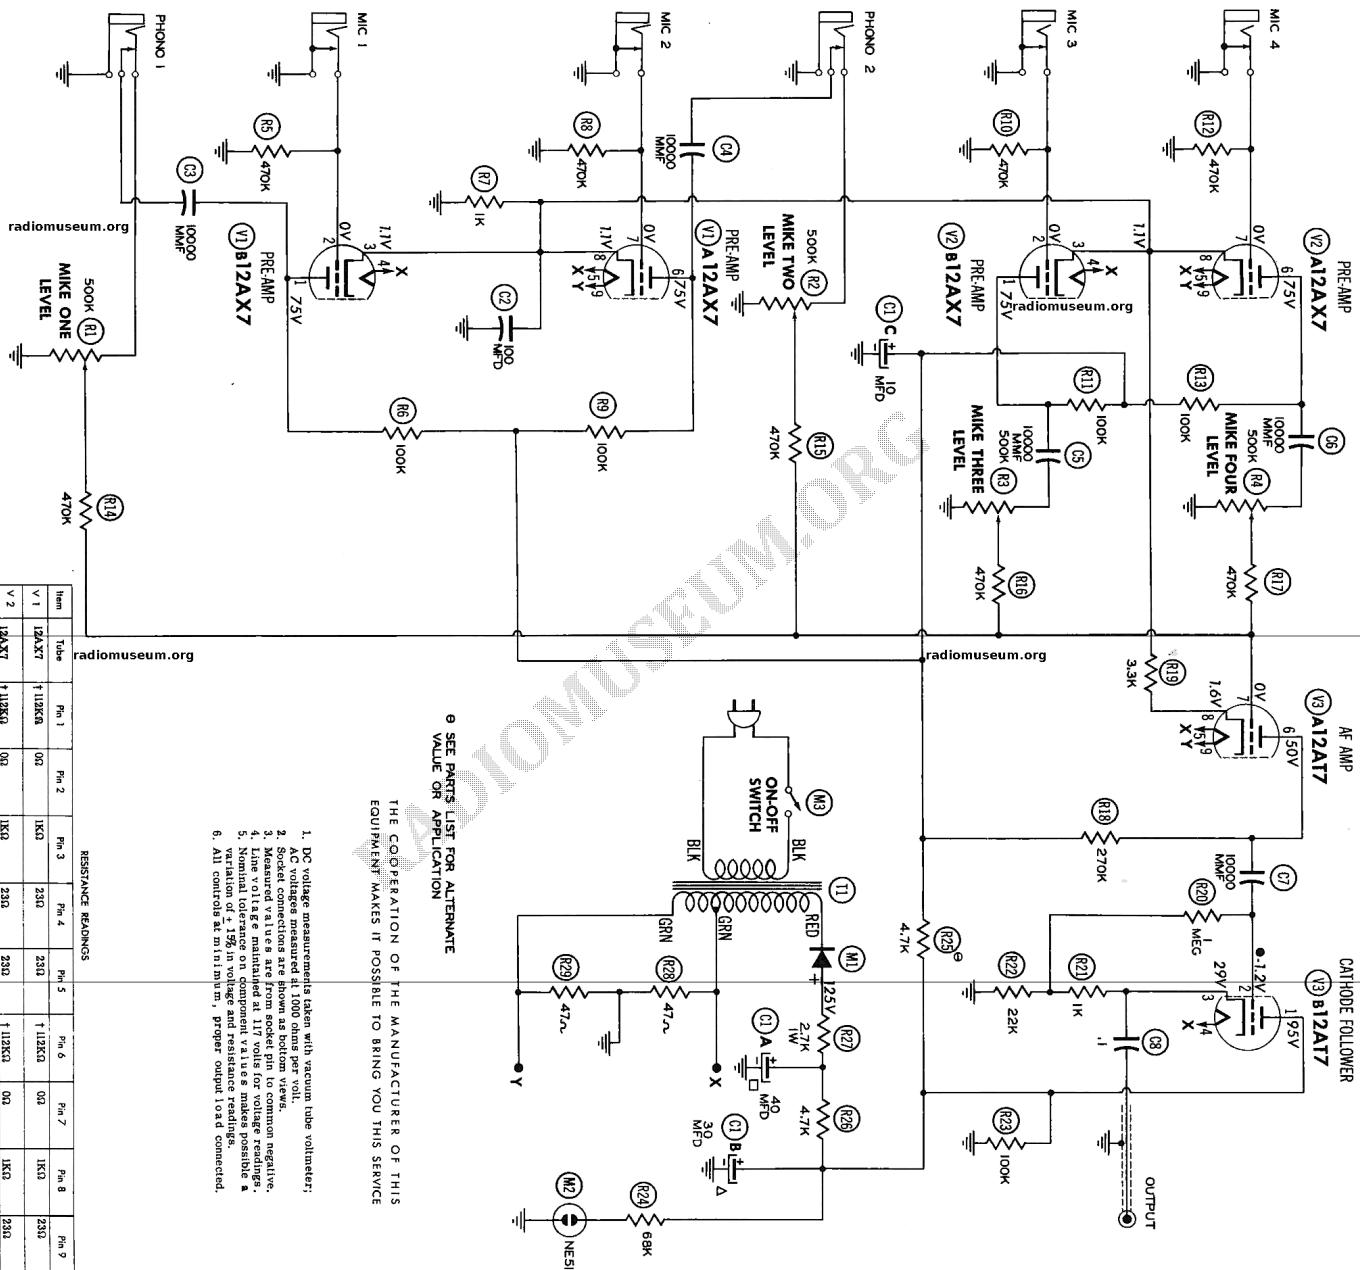

A PHOTOFACT STANDARD NOTATION SCHEMATIC
© Howard W. Sams & Co., Inc. 1956

RESISTANCE READINGS

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9
V 1	12AX7	1.12KΩ	0Ω	1KΩ	23Ω	23Ω	† 1.12KΩ	0Ω	1KΩ	23Ω
V 2	12AX7	1.12KΩ	0Ω	1KΩ	23Ω	23Ω	† 1.12KΩ	0Ω	1KΩ	23Ω
V 3	12AX7	1.7.4KΩ	1MΩ	1KΩ	23Ω	23Ω	† 2.82KΩ	† 24KΩ	4.3KΩ	23Ω

† MEASURED FROM OUTPUT OF M1.
* ALL CONTROLS SET AT MAXIMUM.

1. DC voltage measurements taken with vacuum tube voltmeter;
2. AC voltages measured in tube socket pins.
3. Measured values are from socket pin to common negative.
4. Line voltage maintained at 117 volts for voltage readings.
5. Nominal tolerance on component values makes possible a variation of ± 12% in voltage and resistance.
6. All controls at maximum, proper output load connected.

THE COOPERATION OF THE MANUFACTURER OF THIS EQUIPMENT MAKES IT POSSIBLE TO BRING YOU THIS SERVICE

SEE PARTS LIST FOR ALTERNATE VALUE OR APPLICATION