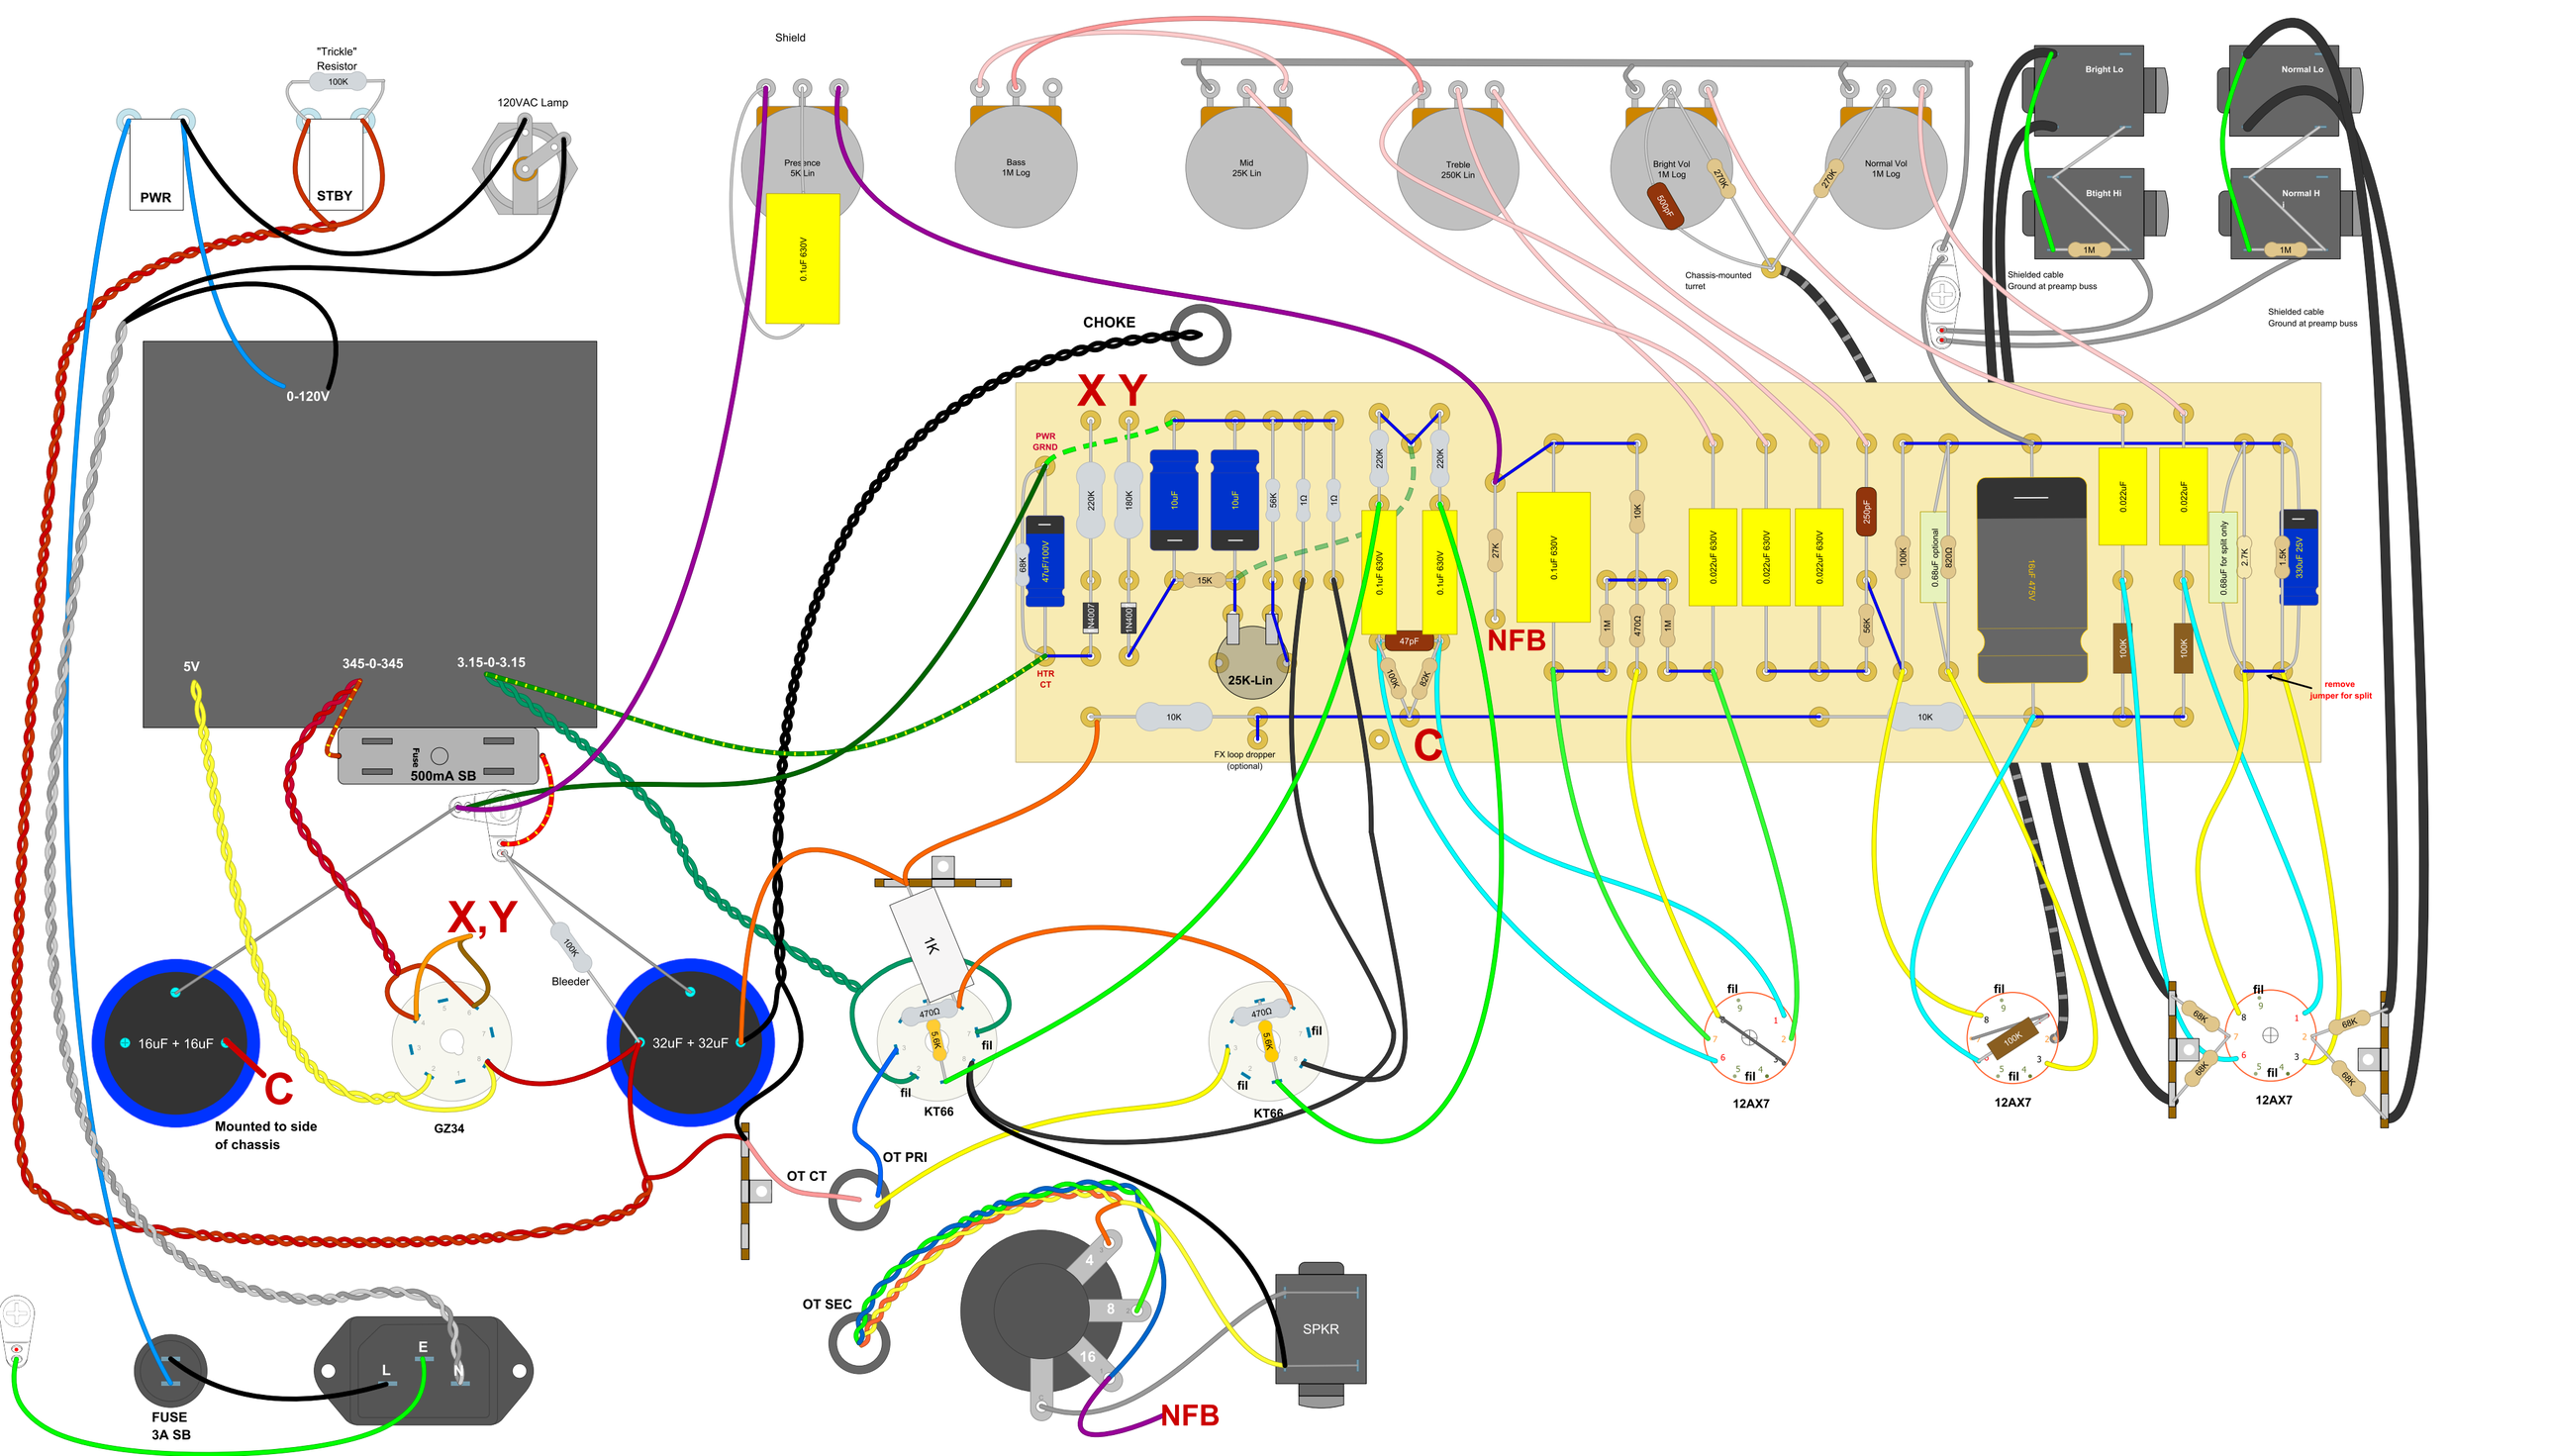
"Trickle"
Resistor
100K
PWR
STBY
120VAC Lamp
Shield
Presence
5K Lin
0.1uF 630V
Bass
1M Log
Mid
25K Lin
Treble
250K Lin
Bright Vol
1M Log
500pF
270K
Normal Vol
1M Log
Bright Lo
Btight Hi
1M
Normal Lo
Normal H
1M
Chassis-mounted
turret
Shielded cable
Ground at preamp buss
Shielded cable
Ground at preamp buss
CHOKE
0-120V
X Y
PWR
GRND
HTR
CT
68K
47uF/100V
220K
180K
N4007
1N4001
10uF
10uF
15K
56K
1Ω
1Ω
25K-Lin
220K
220K
0.1uF 630V
0.1uF 630V
47pF
100K
82K
10K
FX loop dropper
(optional)
27K
0.1uF 630V
NFB
10K
1M
470Ω
1M
0.022uF 630V
0.022uF 630V
0.022uF 630V
250pF
56K
100K
0.68uF optional
820Ω
16uF 475V
0.022uF
0.022uF
100K
100K
0.68uF for split only
2.7K
1.5K
330uF 25V
10K
remove
jumper for split
C
5V
345-0-345
3.15-0-3.15
Fuse
500mA SB
X,Y
100K
Bleeder
16uF + 16uF
C
Mounted to side
of chassis
GZ34
32uF + 32uF
1K
470Ω
68K
fil
KT66
470Ω
68K
fil
KT66
fil
12AX7
fil
100K
12AX7
68K
68K
fil
12AX7
68K
68K
OT CT
OT PRI
OT SEC
4
8
16
C
SPKR
NFB
FUSE
3A SB
E
L
N