


AB763 Negative Feedback Mod

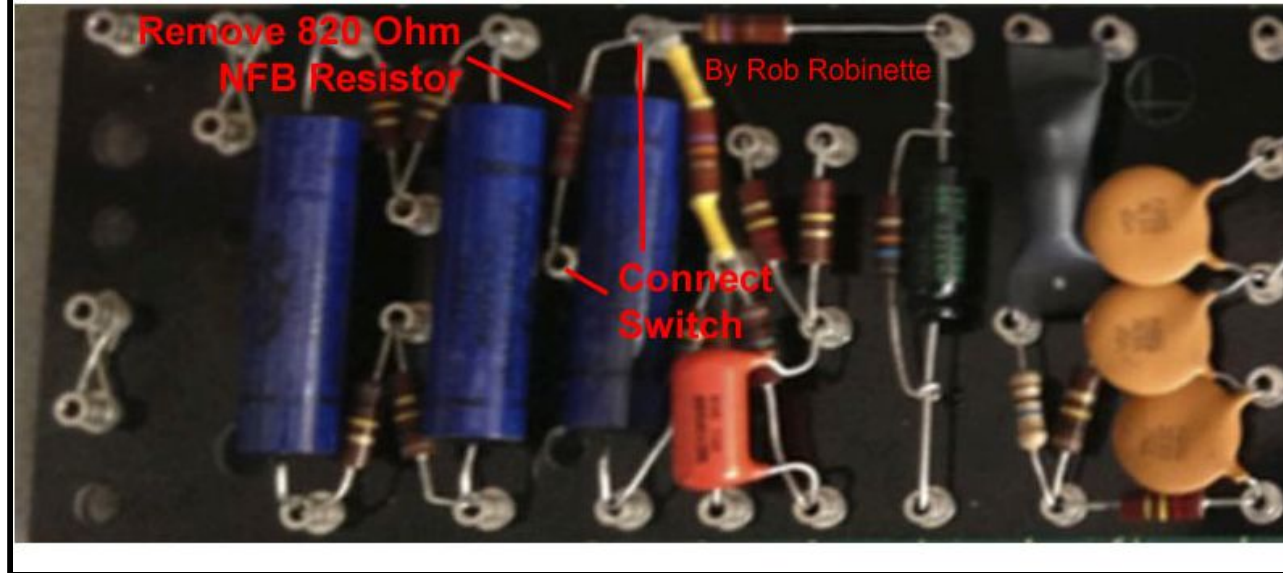

NFB mod for the Fender blackface/silverface amps. You must remove (or just clip a leg of) the original 820 ohm negative feedback resistor then connect the 3-way switch to the top and bottom resistor eyelets/turrets.

Speaker Tap and Feedback Levels for the 5F6A, JTM45 and Similar Amps

Speaker Tap	5F6A Light Feedback	Moderate	JTM45 Heavy
2 ohm	27k 5F6A	20k	10k
4 ohm	39k	27k	13k
8 ohm	56k	39k	20k
16 ohm	75k	56k	27k JTM45

Moderate is 41% more feedback than Light. Heavy is 2.8 times more feedback than Light.